

# Efectis Nederland BV

Efectis Nederland BV  
Centre for Fire Safety  
Lange Kleiweg 5  
P.O. Box 1090  
2280 CB Rijswijk

## Efectis Nederland-report

### 2007-Efectis-R0009[Rev.1]

Determination of the fire resistance according to EN 1365-2:1999 of a suspended ceiling system of CMC with Rockfon Sonar D 900 x 900 concealed ceiling tiles, suspended under an aerated concrete floor supported by steel sections

[www.efectis.nl](http://www.efectis.nl)

T +31 15 276 34 80  
F +31 15 276 30 25  
E [info@efectis.nl](mailto:info@efectis.nl)

Date June 2007

Author(s) P.G.R. Scholten B. Sc.  
dr. ir. G. van den Berg

Copy no  
No. of copies  
Number of pages 10  
Number of appendices 3

Sponsor Rockwool / Rockfon BV  
Industrieweg 15  
6045 JG Roermond  
Postbus 1160  
6040 KD Roermond  
The Netherlands

Project name Fire resistance floor ceiling construction  
Project number 2006058/101

All rights reserved.

No part of this publications may be reproduced and/or published by print, photoprint, microfilm or any others means without the previous written consent of Efectis.

In case this report was drafted on instructions, the rights and obligations of contracting parties are subject to either the Standard Conditions for Research Instructions given to TNO, or the relevant agreement concluded between the contracting parties. Submitting the report for inspection to parties who have a direct interest is permitted.

© 2007 Efectis Nederland BV: a TNO company

This report is issued by the TNO company Efectis Nederland BV (previously TNO Centre for Fire Research). TNO decided, in response to international developments and requests by customers, to collaborate with two European Egolf partners, both highly experienced in fire safety: the Norwegian Sintef/NBL and the French CTICM. Thus, through scaling up, a more comprehensive service of high quality and a wider range of facilities can be offered. In order to achieve this, the fire safety related activities of the partners involved have been privatised in this collaboration. With respect to TNO this has lead to the privatisation on the 1<sup>st</sup> of July of the activities of the TNO Centre for Fire Research via the establishment of the company Efectis Nederland BV.

## Contents

<b>1</b>	<b>Subject .....</b>	<b>3</b>
<b>2</b>	<b>Investigation .....</b>	<b>3</b>
<b>3</b>	<b>Sponsor .....</b>	<b>3</b>
<b>4</b>	<b>Place and data regarding the investigation.....</b>	<b>3</b>
<b>5</b>	<b>Date and number of the report.....</b>	<b>3</b>
<b>6</b>	<b>Investigated construction .....</b>	<b>4</b>
6.1	General.....	4
6.2	Materials .....	4
6.2.1	Suspended ceiling system .....	4
6.2.2	Ceiling tiles.....	4
6.2.3	Floor and supporting construction .....	5
6.2.4	Fixing materials .....	5
6.2.5	Sealing materials.....	5
6.3	Method of assembly and mounting.....	5
6.3.1	Floor.....	5
6.3.2	Ceiling.....	5
<b>7</b>	<b>Production of the construction .....</b>	<b>6</b>
<b>8</b>	<b>Course of investigation .....</b>	<b>6</b>
8.1	Verification of the specimen .....	6
8.2	Conditioning .....	6
8.3	Density and humidity measurements .....	6
8.4	Fire test .....	6
8.4.1	Test conditions.....	6
8.4.2	Load .....	7
8.4.3	Measurements .....	7
<b>9</b>	<b>Observations during heating.....</b>	<b>7</b>
<b>10</b>	<b>Test results.....</b>	<b>7</b>
10.1	Uncertainty of measurement .....	7
<b>11</b>	<b>Summary .....</b>	<b>8</b>
<b>12</b>	<b>Field of application .....</b>	<b>8</b>
<b>13</b>	<b>Drawing .....</b>	<b>10</b>

### Appendices

- A Observations
- B Testresults
- C Photographs

## 1 Subject

A floor / ceiling construction build up of reinforced aerated concrete floor members supported by steel sections IPE 140 with a suspended ceiling system of CMC 850 T grid profiles with Rockfon Sonar D concealed ceiling tiles with the module size 900 x 900 x 25 mm.

## 2 Investigation

Determination of the fire resistance according to EN 1365-2: 1999.

## 3 Sponsor

Rockwool / Rockfon BV  
Industrieweg 15  
6045 JG Roermond  
Postbus 1160  
6040 KD Roermond  
The Netherlands

## 4 Place and data regarding the investigation

The investigation took place at the laboratory of Efectis Nederland BV te Rijswijk, The Netherlands.

Building the walls and floor construction:	30 <sup>th</sup> of October 2006
Installing the suspended ceiling:	5 <sup>th</sup> of December 2006
Fire test:	5 <sup>th</sup> of December 2006.

## 5 Date and number of the report

Date report: June 2007.  
Report number: 2007-Efectis-R0009[Rev.1].

## 6 Investigated construction

### 6.1 General

A floor ceiling construction was the subject of the investigation. The build up was of reinforced aerated concrete floor members supported by steel sections IPE 140 with a suspended ceiling system of CMC 850, measurements 3.2 x 4.0 m, see figure 12.1. The ceiling tiles are produced by Rockfon and of the type Rockfon Sonar D concealed with the module size 900 x 900 x 25 mm.

### 6.2 Materials

#### 6.2.1 *Suspended ceiling system*

The profiles were made of cold rolled thermally zinc coated steel. Strip steel of 0.20 mm was wrapped around the edges of the profiles. This strip steel was protected by an oven dried epoxy primer with a thickness of 5µm. On the visible side it was coated with a polyester paint with a thickness of 20µm.

The system was build up from the following profiles:

- (1)<sup>1</sup>: Main profile of the type CMC 850-10-001 main measurements 38 x 24 with a material thickness of 0.4 mm.
- (2): Intermediate profile of the type CMC 853-30-001 main measurements 38 x 24 mm length 900 mm, material thickness of 0.4 mm.
- (3): Quick suspender of the type CMC 11000, existing of two parts steel wires Ø 4 mm and a coupling.
- (4): Wall profiles of the type CMC 1420-001, main measurements 24 x 24 x 0.6 mm.
- (5): Section of CMC type 102, main measurements 10 x 17 x 21 mm.
- (6): Spacer bar, of CMC type 826-828.

The main profiles were connected to the quick suspenders (3), the positions are given in figure 12.1.

Each main profile was provided with one fire-break and a length connector, see figure 12.1. Also the intermediate profiles had a fire break.

#### 6.2.2 *Ceiling tiles*

Rockfon, type Sonar D concealed ceiling tiles, a self supporting tile made of stone wool finished with paint and a structurized mineral membrane on the visible side with the module size 900 x 900 x 25 mm (l x w x t). See also paragraph 8.3.

---

<sup>1</sup> The numbers in between the brackets refer to the numbers in figure 12.1

### 6.2.3 *Floor and supporting construction*

The floor construction was made out of:

- Three steel sections IPE 140, length 4600 mm, span  $L_t = 4150$  mm.
- Six reinforced aerated concrete floor slabs:
  - 150 x 750 mm, length 3050 mm (4 pieces).
  - 150 x 400 mm, length 3050 mm (2 pieces).

The floor was build in the steel test frame in which a aerated concrete supporting construction was made with a thickness of 150 mm and inner dimensions of 4000 x 3200 mm.

### 6.2.4 *Fixing materials*

- Steel nails galvanic ally zincd, measurements  $\varnothing 3.5 \times 60$  mm, c.t.c. approximately 250 mm, for fixing the wall profiles (4) to the aerated concrete frame.
- Caddy clip of the type 4-H-24, for the positions see figure 12.1.

### 6.2.5 *Sealing materials*

Strips of stone wool, type Rockwool 750, density 115 kg/m<sup>3</sup>:

- Used for closing the joints between the floor slabs.

## 6.3 **Method of assembly and mounting**

The build up of the construction is given in figure 12.1.

The assembly and mounting of the floor / ceiling construction is given in 6.3.1 and 6.3.2.

### 6.3.1 *Floor*

- Placing three steel sections IPE 140, c.t.c. approximately 1200 mm, in the longitudinally direction of the aerated concrete frame.
- Placing the aerated concrete floor slabs in the steel test frame.
- Closing the joints between the floor slabs, between the floor slabs and the aerated concrete frame and the openings at the locations of the steel sections.

### 6.3.2 *Ceiling*

- Placing the wall profiles (4) on the inside of the aerated concrete frame at a distance of approximately 420 mm from the bottom of the floor slabs fixed with steel nails with a c.t.c. distance of approximately 250 mm.
- Placing the Caddy clip and quick suspenders (3) to the IPE 140 sections, c.t.c. 1200 mm crosswise the span of the steel sections, see figure figure 12.1.
- Shortening the main profiles (1) to lengths of approximately 1730 and 1450 mm.
- Connecting the main profiles and placing them to the quick suspenders (3).
- Adjusting the quick suspenders to correct length.
- Placing the spacer bars (6) with the locking pin, see figure C 1.
- Intermediate profiles (2), c.t.c. 900 mm.
- Placing of the ceiling tiles, with the C profile in the groove.

## 7 Production of the construction

- Rockwool / Rockfon BV:  
Production of the ceiling tiles, placing the suspended ceiling system and tiles.
- Chicago Metallic:  
Production of the profiles of the ceiling system
- Efectis Nederland BV Rijswijk, The Netherlands:  
Supporting construction

## 8 Course of investigation

### 8.1 Verification of the specimen

Efectis Nederland BV was not involved in the selection procedure of the specimen. During mounting the used materials and parts were verified against the supplied data.

### 8.2 Conditioning

From the moment of installation until the fire test the construction was stored in the laboratory of Efectis Nederland BV with the following conditions:

- Ambient temperature:  $20 \pm 5^\circ\text{C}$ .
- Relative humidity:  $50 \pm 10\%$ .

### 8.3 Density and humidity measurements

The density and the moisture equilibrium of the stone wool ceiling tiles was determined.

- Density<sup>2</sup>  $198 \text{ kg/m}^3$ .
- Moisture equilibrium<sup>3</sup> of  $0.5\%$ .

### 8.4 Fire test

#### 8.4.1 Test conditions

The test was performed under the conditions as specified in EN 1365-2: 1999, using the standard fire curve. The specimen was heated from the underside only. The aim for the furnace pressure, as measured 100 mm below the ceiling, was 20 Pa.

---

<sup>2</sup> Determined before drying

<sup>3</sup> Determined after drying for at least 24 hrs at  $105^\circ\text{C}$

#### 8.4.2 *Load*

Dead weight was distributed on the aerated concrete floor slabs, resulting in 1.32 kN/m on each of the IPE 140 sections. The load induced by the weight of the construction itself was 1.68 kN/m on each of the IPE 140 sections.

The total load on each of the IPE 140 sections during heating was 3 kN/m.

#### 8.4.3 *Measurements*

During the heating the following data were measured and registered:

- gas temperatures inside the furnace with ten plate thermometers (TOV 1 to TOV 10), regularly spread over the directly heated surface.
- The temperatures of the flanges of the steel sections with six thermocouples (TK 1 up to 6).
- The temperatures of the web of the steel sections with six thermocouples (TK 7 up to 12).
- The air temperatures in the cavity with five thermocouples (TK 13 up to TK 17).
- The surface temperatures with five thermocouples (TK 18 up to TK 22).
- The pressure inside the furnace at 100 mm below the ceiling.
- The deflection at the centre of the test specimen.
- Temperature and air velocity outside the furnace.

The positions of the thermocouples and deflection measurement are given in figure B1.

## 9 Observations during heating

On request of the sponsor the heating was stopped after 48 minutes. No criteria was met at that time.

For a more detailed description of the observations a reference is made to appendix A.

## 10 Test results

Test results are given in graphs in appendix B.

During the heating the temperature and airspeed fulfilled the requirements of EN 1365-2: 1999.

### 10.1 **Uncertainty of measurement**

Because of the nature of fire resistance testing and the consequent difficulty in quantifying the uncertainty of measurement of fire resistance, it is not possible to provide a stated degree of accuracy of the result.

## 11 Summary

According to the EN 1365-2: 1999 a floor / ceiling construction was investigated which was build up of reinforced aerated concrete floor members supported by steel sections IPE 140. From these sections a ceiling system of CMC 850 T profiles was suspended with Rockfon Sonar D concealed ceiling tiles with the module size 900 x 900 x 25 mm.

The most important results of the investigation are given in table 11.1.

Table 11.1 Summary of test results

Criterion	Time from the start of the heating, during which the criterion was just fulfilled.	
	EN 1365-2: 1999	Remarks
1. Load bearing capacity [R]	48 minutes	No failure
2. Integrity [E] flames cotton pad gap gauges	48 minutes	No failure
	48 minutes	No failure
	48 minutes	No failure
3. Insulation regarding temperature [I] $I_{\text{maximum}}$ $I_{\text{mean}}$	48 minutes	No failure
	48 minutes	No failure
The test was discontinued after 48 minutes.		


## 12 Field of application

The test results are directly applicable to a similar floor / ceiling construction provided the following is true:

- With respect to the structural building member:  
Aerated concrete floor, minimum thickness 150 mm, with IPE 140 steel members  
The maximum moments and shear forces, which when calculated on the same basis as the test load shall not be greater than those tested. The load on the steel members was 3 kN/m.
- With respect to the ceiling system:  
The size of panels of the ceiling lining and suspension system shall not be changed.  
No openings in the lining are allowed.
- With respect to the cavity:  
The height of the cavity, 420 mm, is equal to or greater than the height tested.  
No combustible or insulating material is added to the cavity.



Regarding this field of application it is also required that construction elements, which are connected to the tested construction have a fire resistance which is at least equal to that of the floor / ceiling construction.

A handwritten signature in black ink, appearing to read 'P.G.R. Scholten', enclosed within a large, loopy oval stroke.

P.G.R. Scholten B. Sc.

A handwritten signature in black ink, appearing to read 'G. van der Berg', with a large, stylized 'G' and 'B'.

dr. ir. G. van der Berg

# 13 Drawing

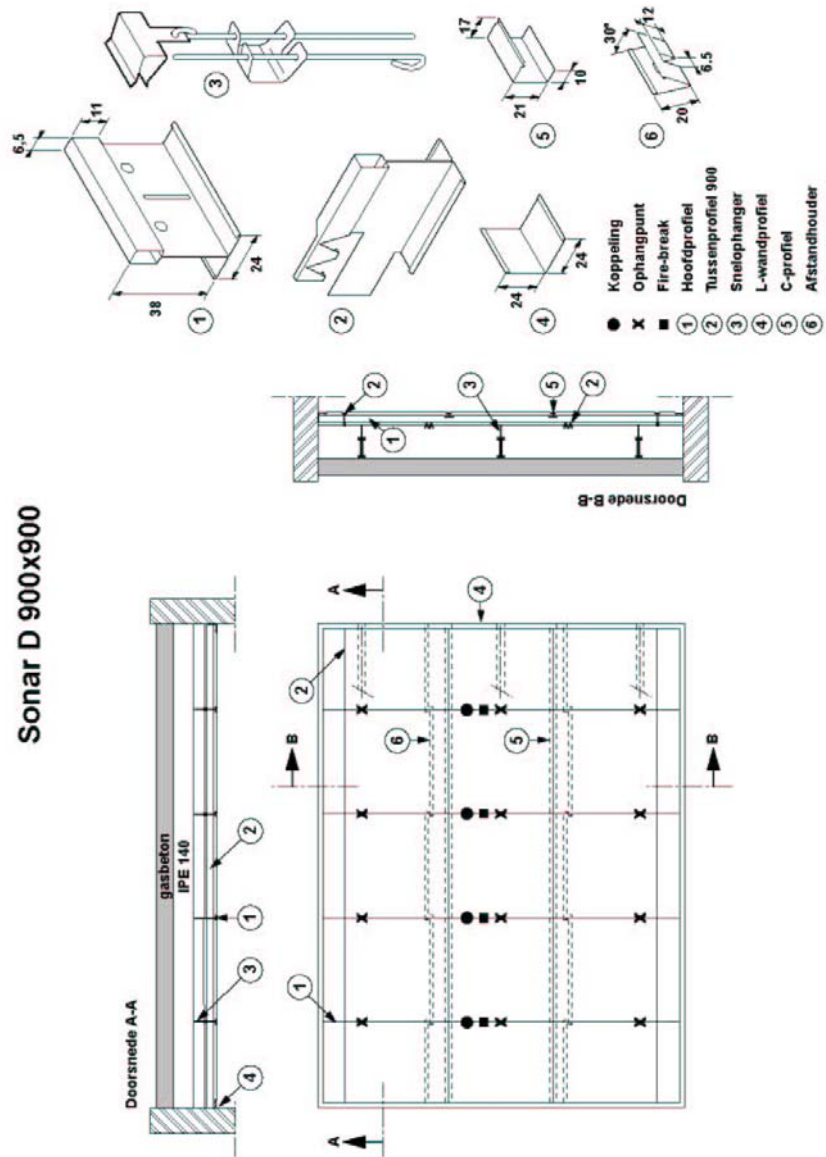


Figure 12.1 Overview of the test set up,

## A Observations

Time [min]	Observation
0	Start of heating.
5	The wall profiles deform
7	The fire breaks are working
11	The fire breaks are pushing the tile out of shape
20	All criteria are met
30	All criteria are met
37	Of one tile the mineral fleece is becoming detached from the tile
48	The end of the heating after consulting the sponsor. All tiles are still positioned in the grid

## **B Testresults**

Figure B1 Overview of the thermocouples

Figure B2: Furnace temperatures

Figure B3: Deviation fire curve according to EN 1363-1

Figure B4: Furnace pressure

Figure B5: Steel temperatures

Figure B6: Cavity temperatures

Figure B7: Surface temperatures

Figure B8: Displacement

Figure B9: Displacement speed

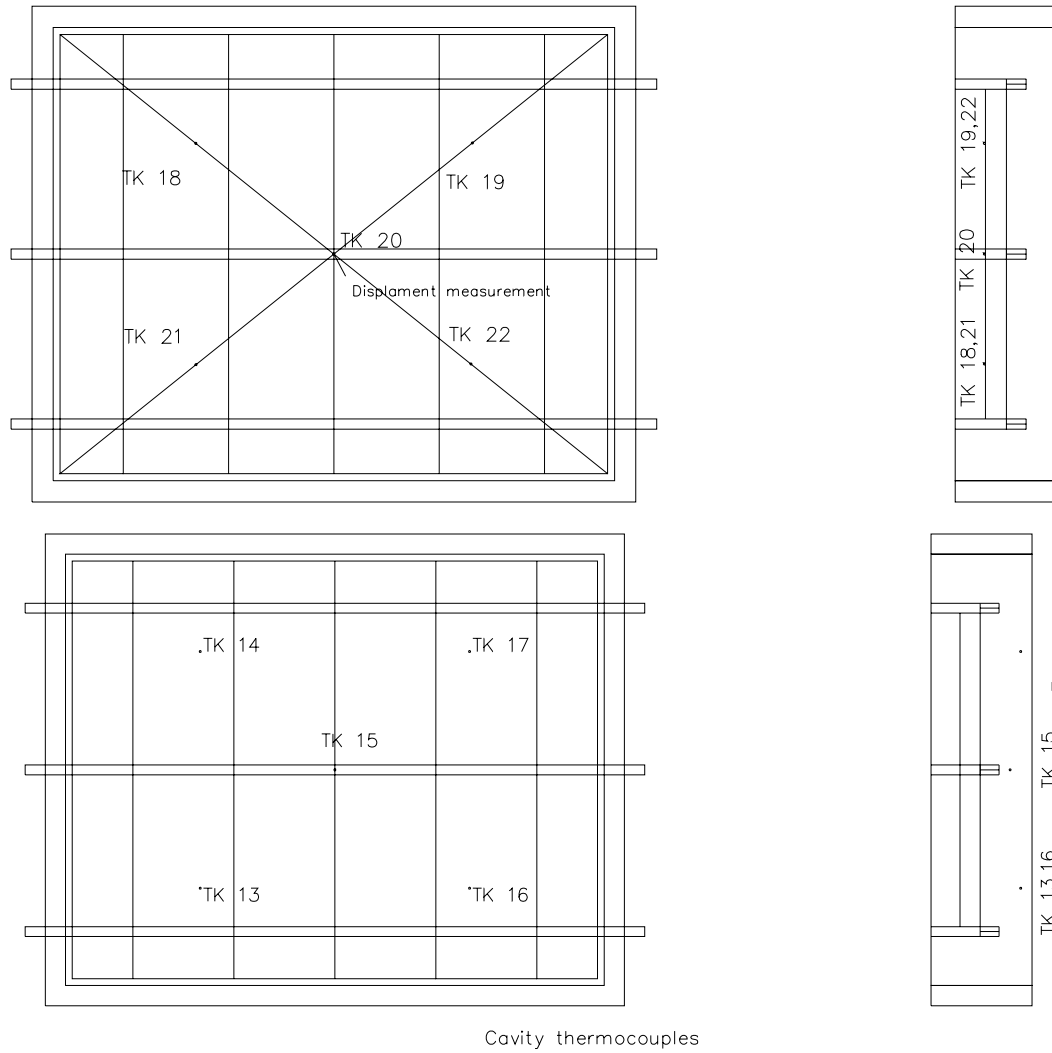


Figure B1 Overview of the thermocouples on the floor and in the cavity

Centre for Fire Safety

Date: 05-12-2006

Project : Rockfon Sonar D concealed 900 x 900 x 25

Projectnbr : 2006058/101

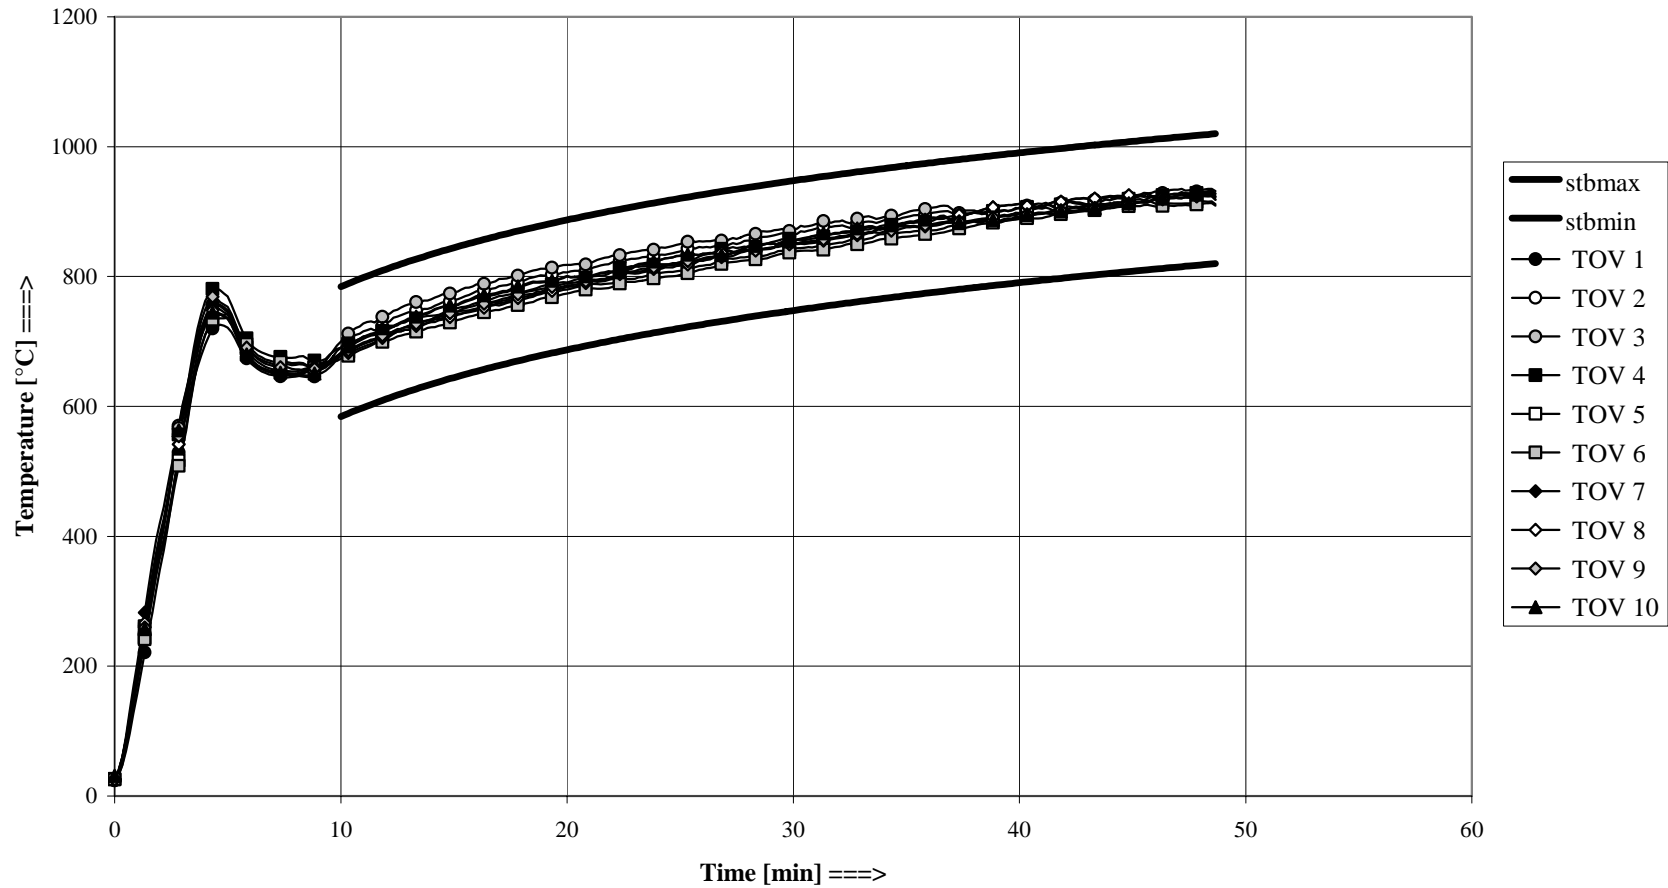


Figure B2: Furnace temperature

Centre for Fire Safety

Date: 05-12-2006

Project : Rockfon Sonar D concealed 900 x 900 x 25

Projectnbr : 2006058/101

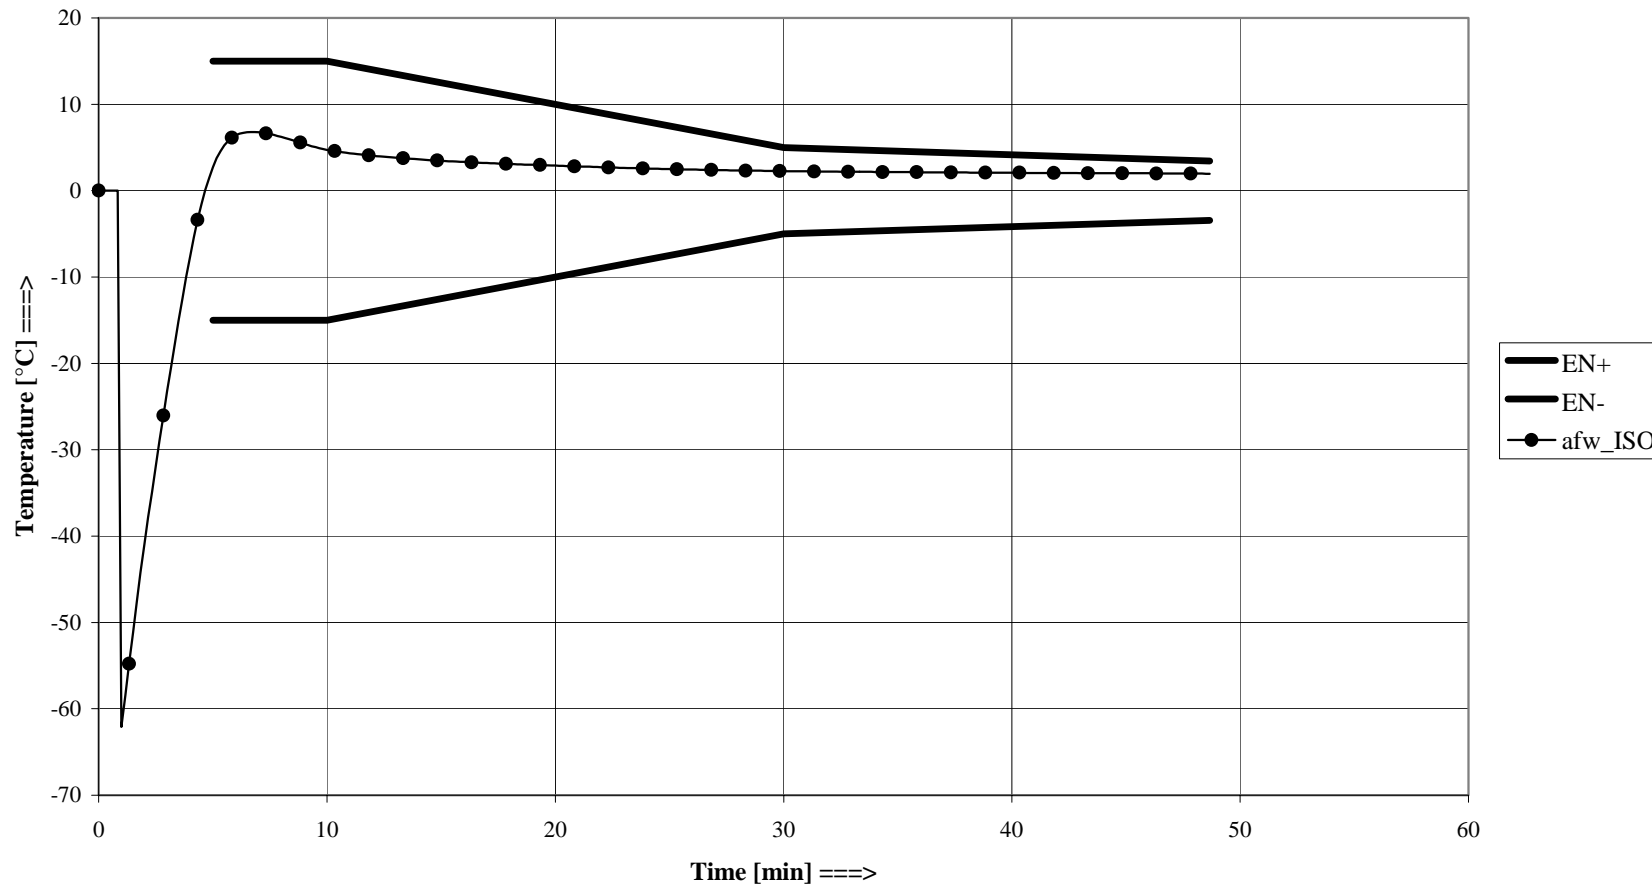


Figure B3: Deviation fire curve

Centre for Fire Safety

Date: 05-12-2006

Project : Rockfon Sonar D concealed 900 x 900 x 25

Projectnbr : 2006058/101




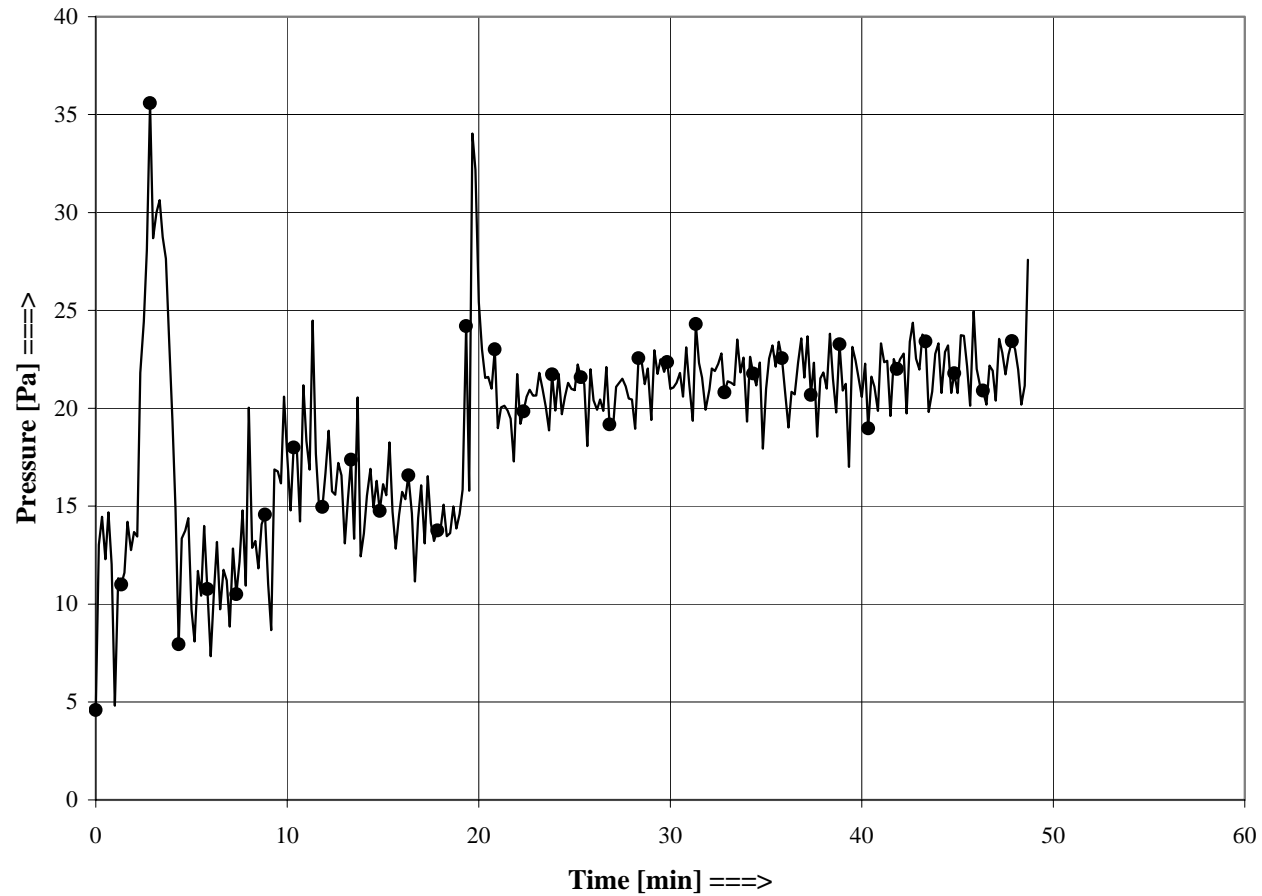


Figure B4: Furnace pressure



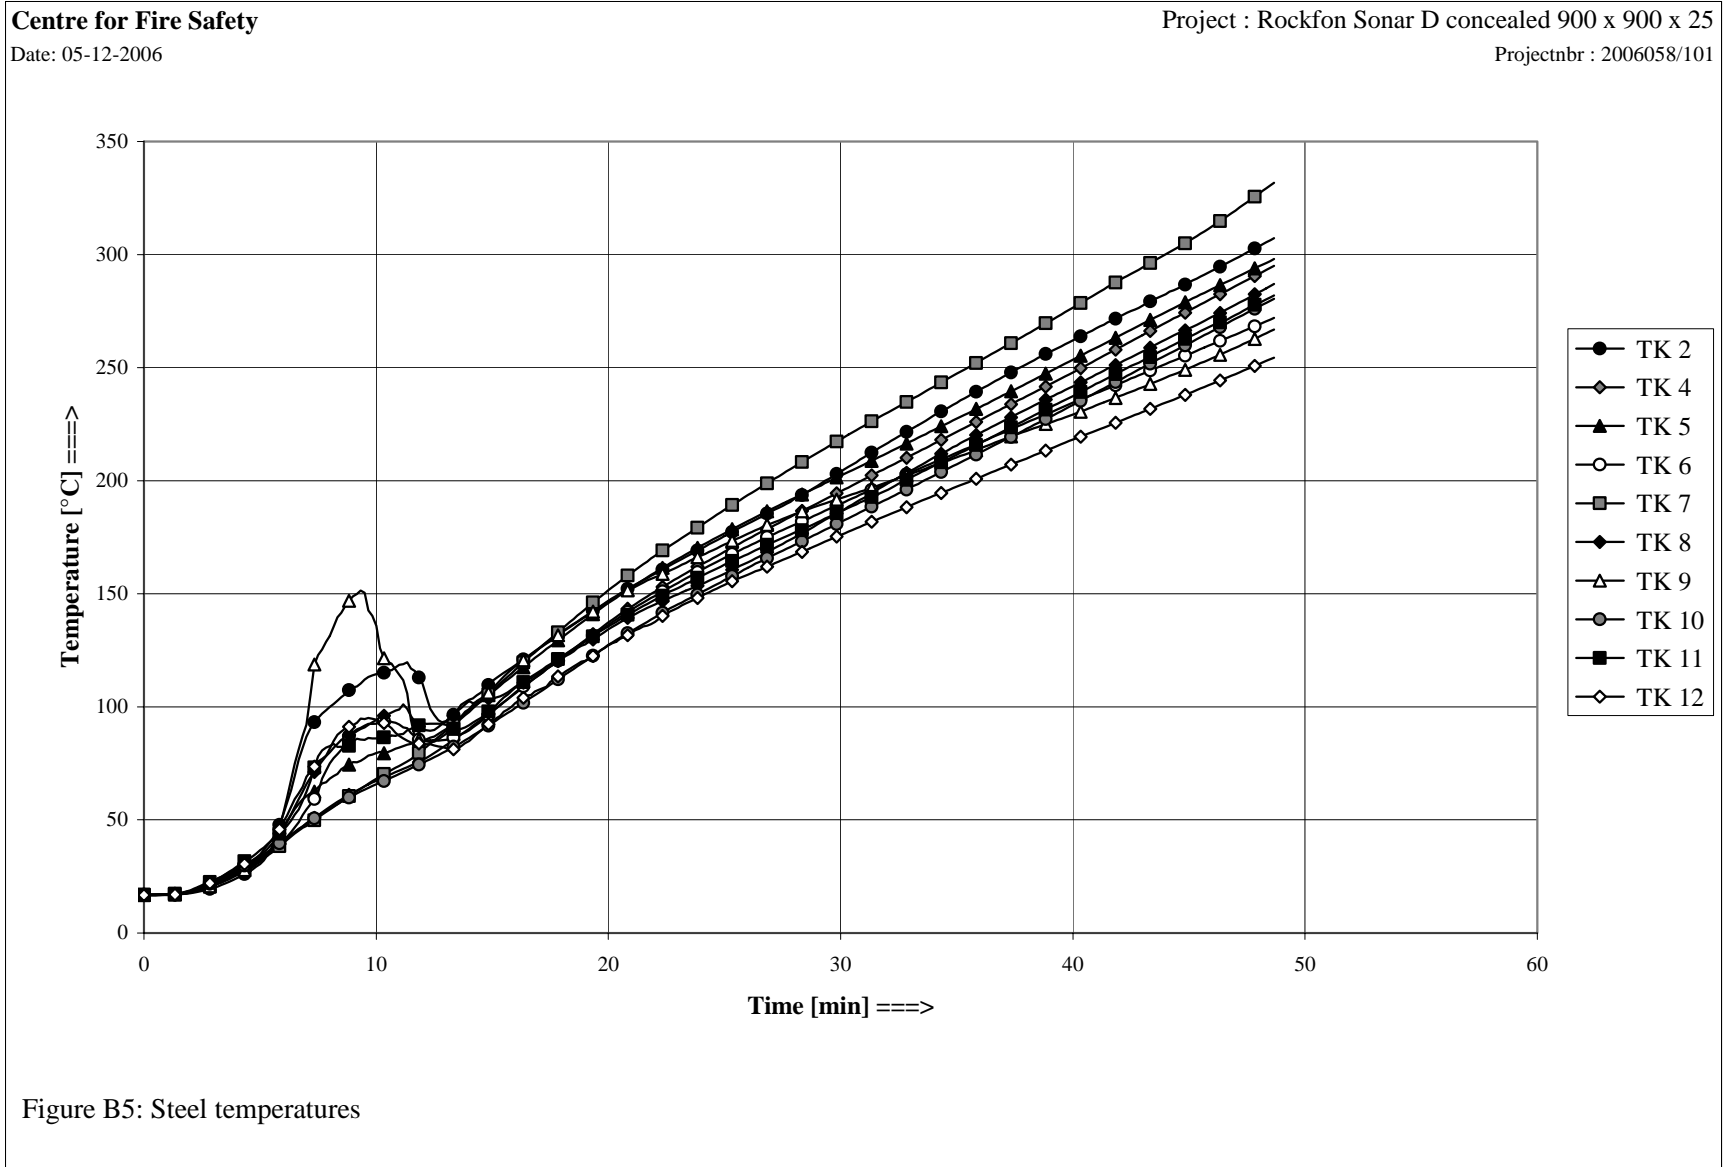

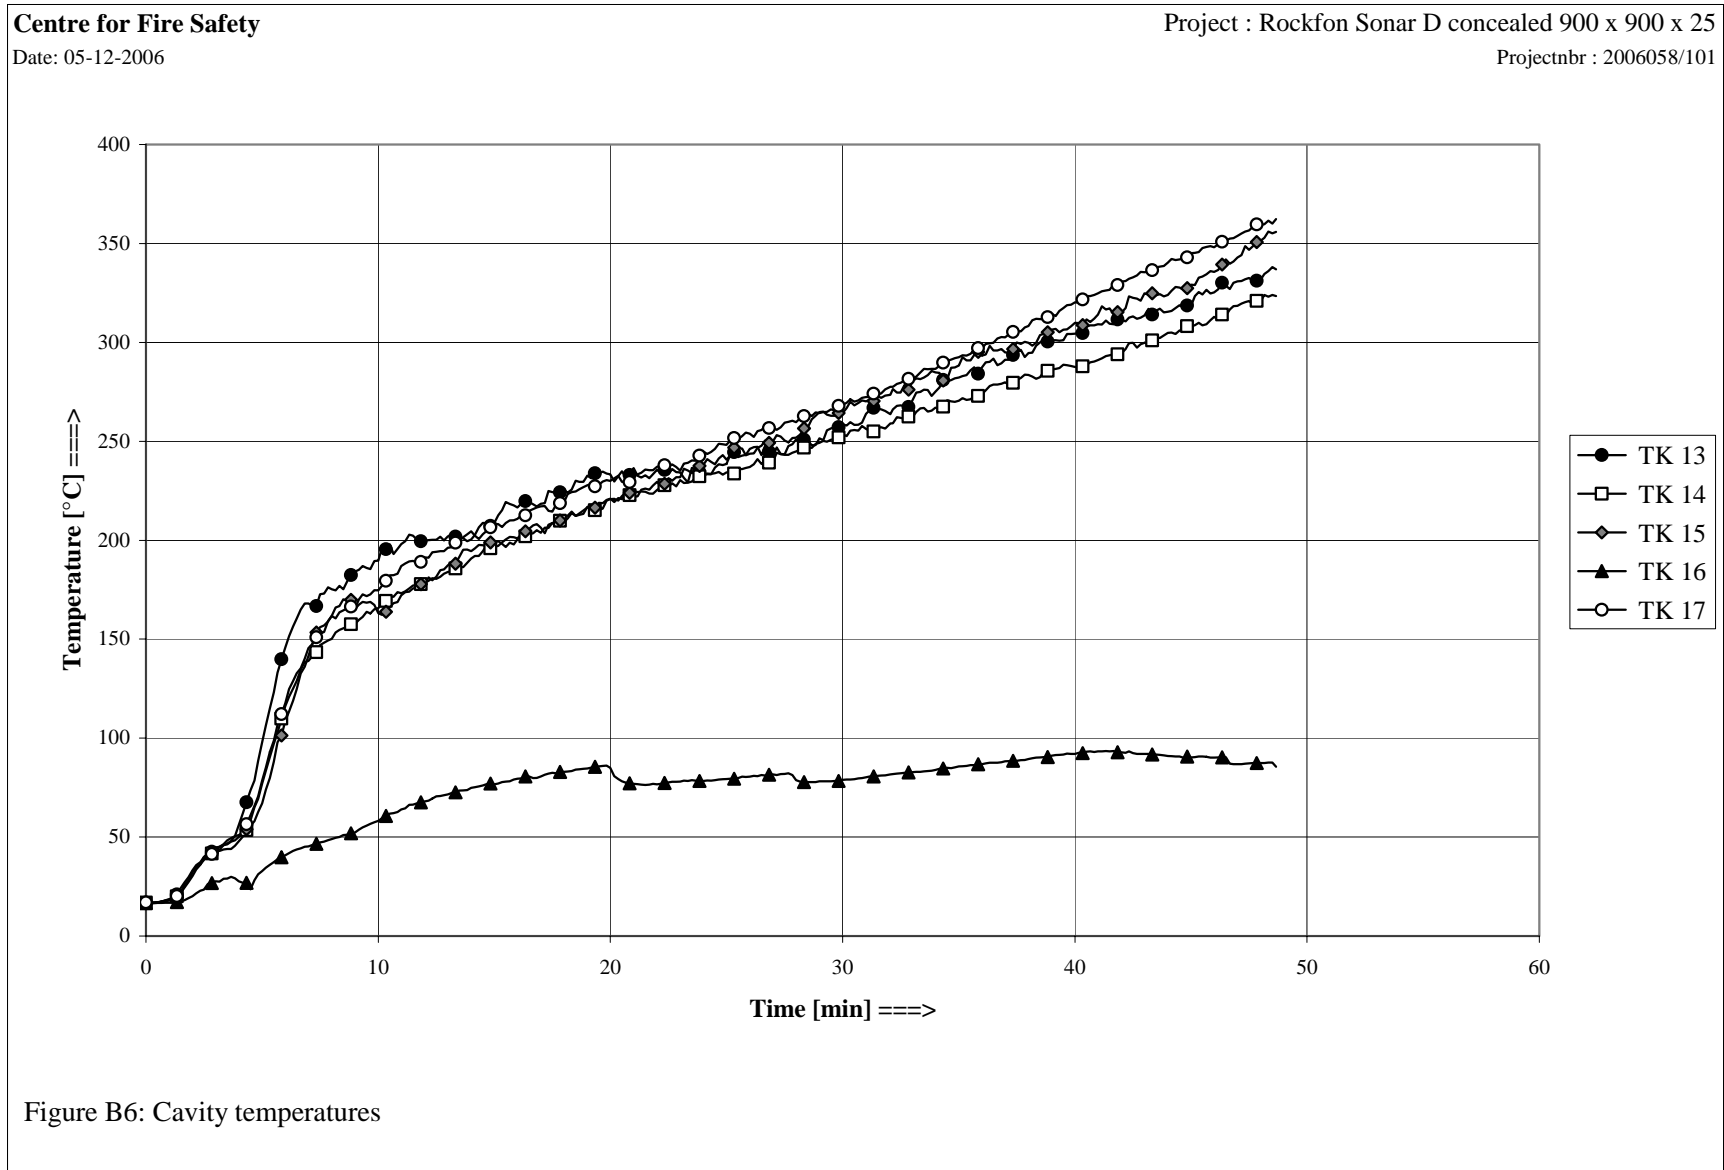

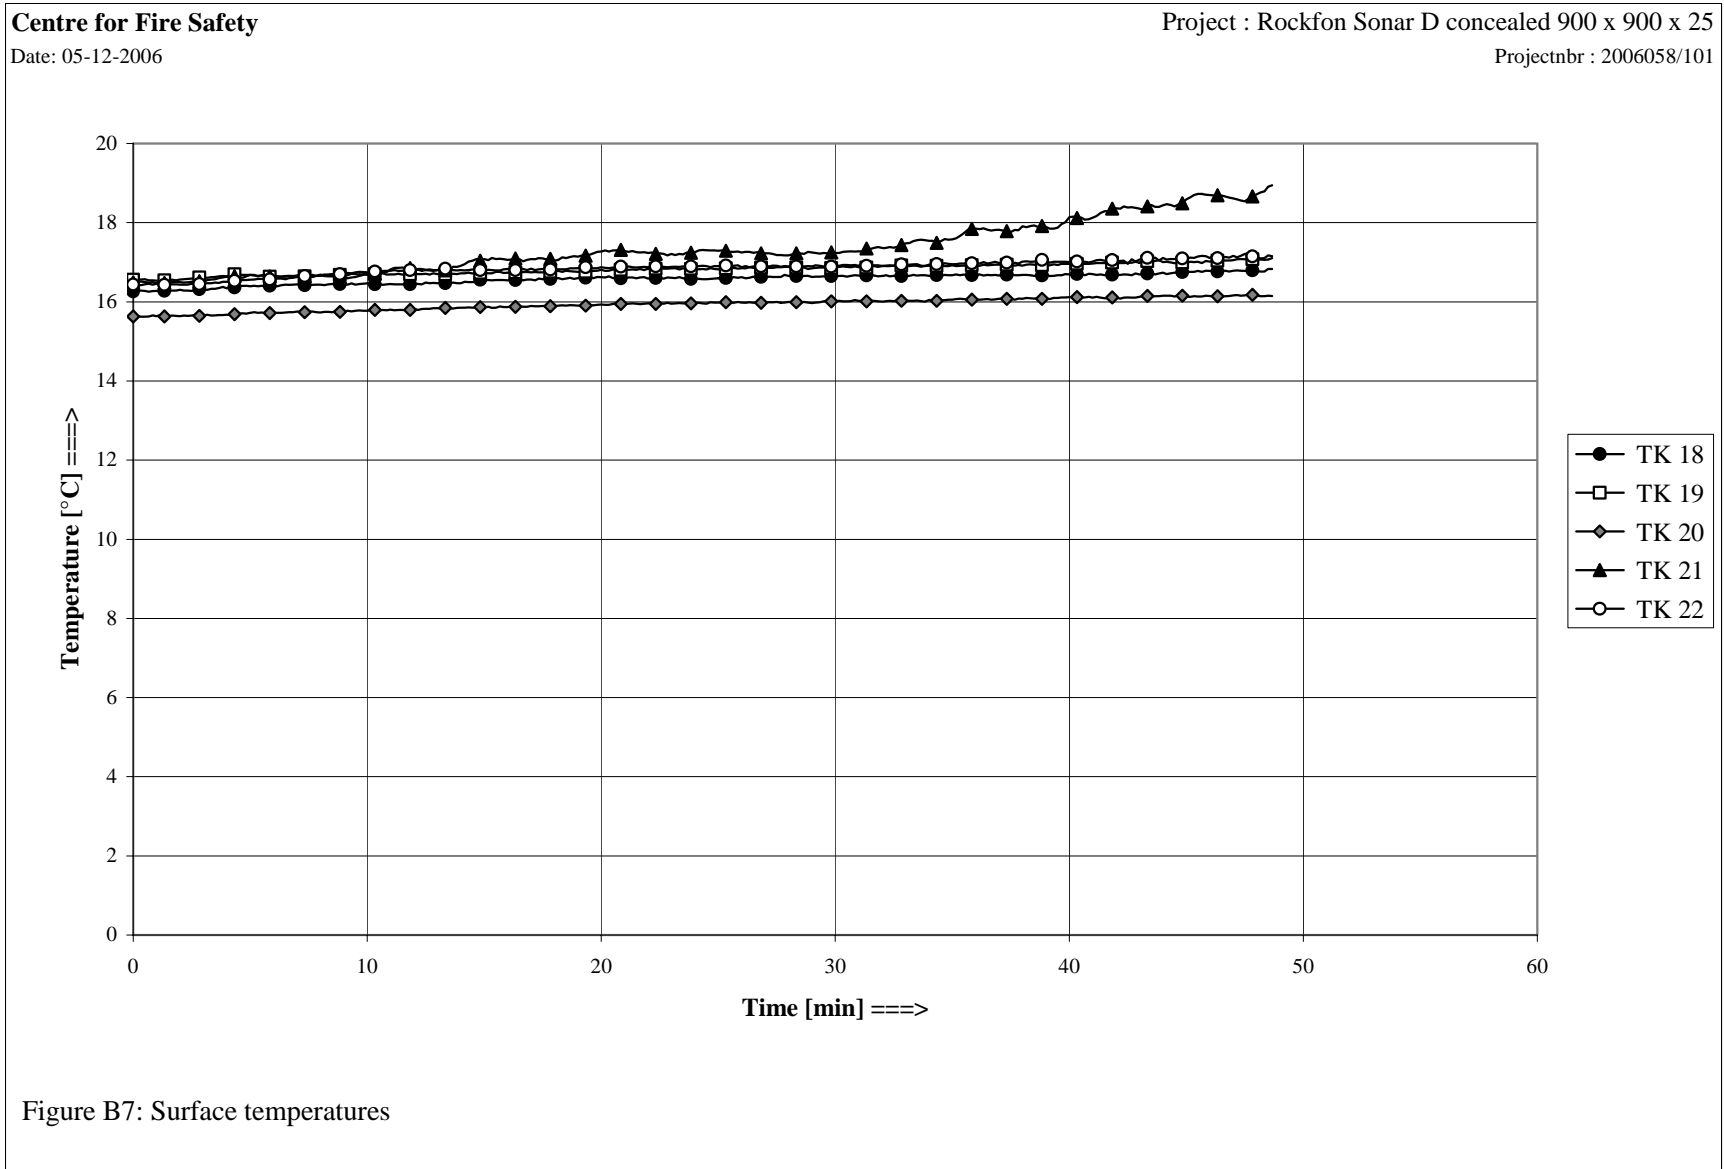

Centre for Fire Safety

Date: 05-12-2006

Project : Rockfon Sonar D concealed 900 x 900 x 25

Projectnbr : 2006058/101

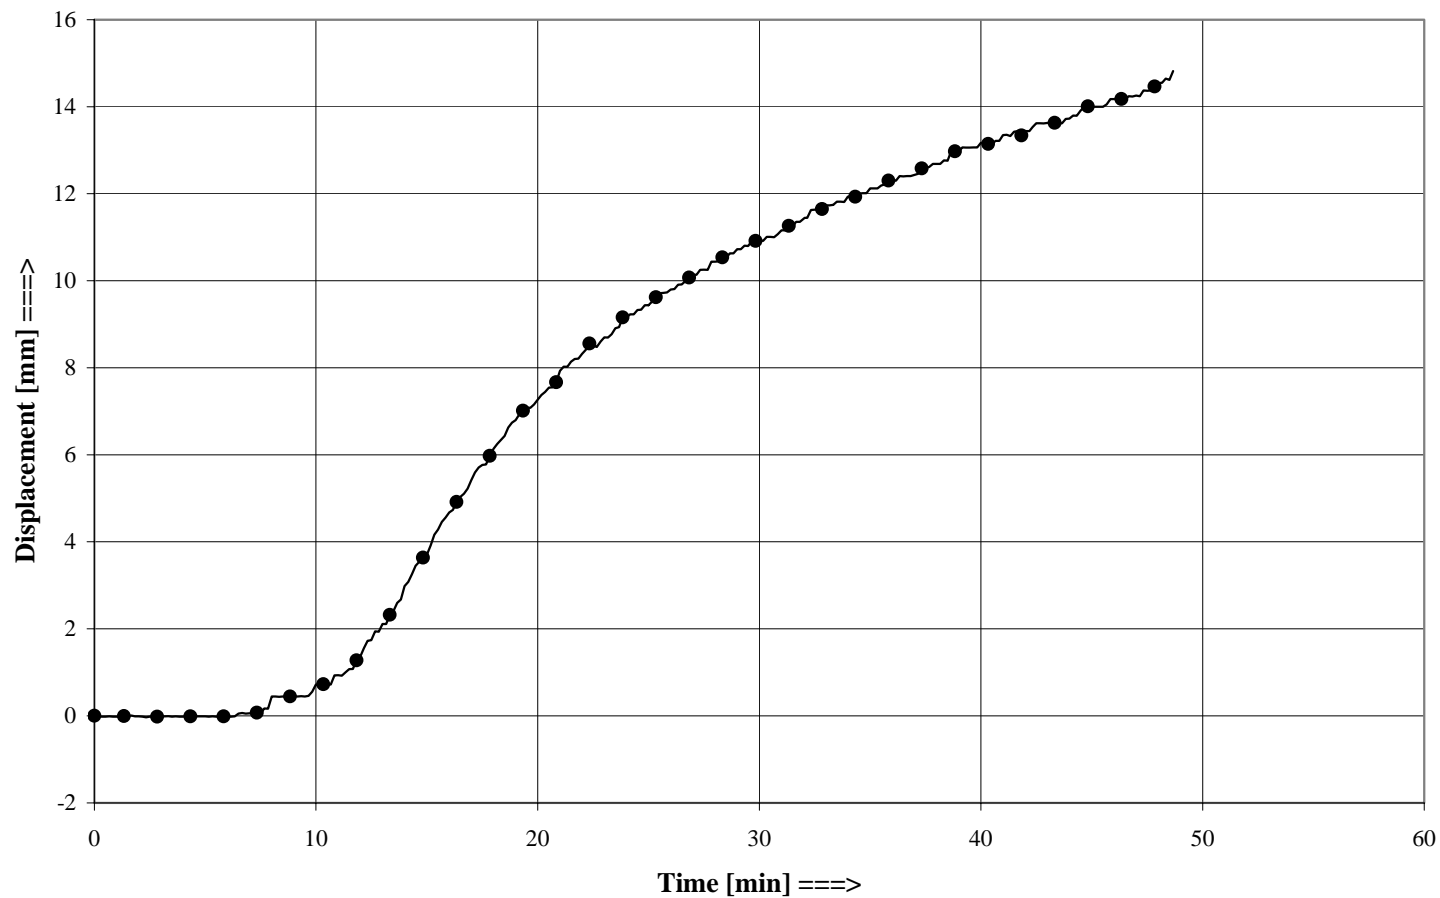


Figure B8: Displacement

Centre for Fire Safety

Date: 05-12-2006

Project : Rockfon Sonar D concealed 900 x 900 x 25

Projectnbr : 2006058/101

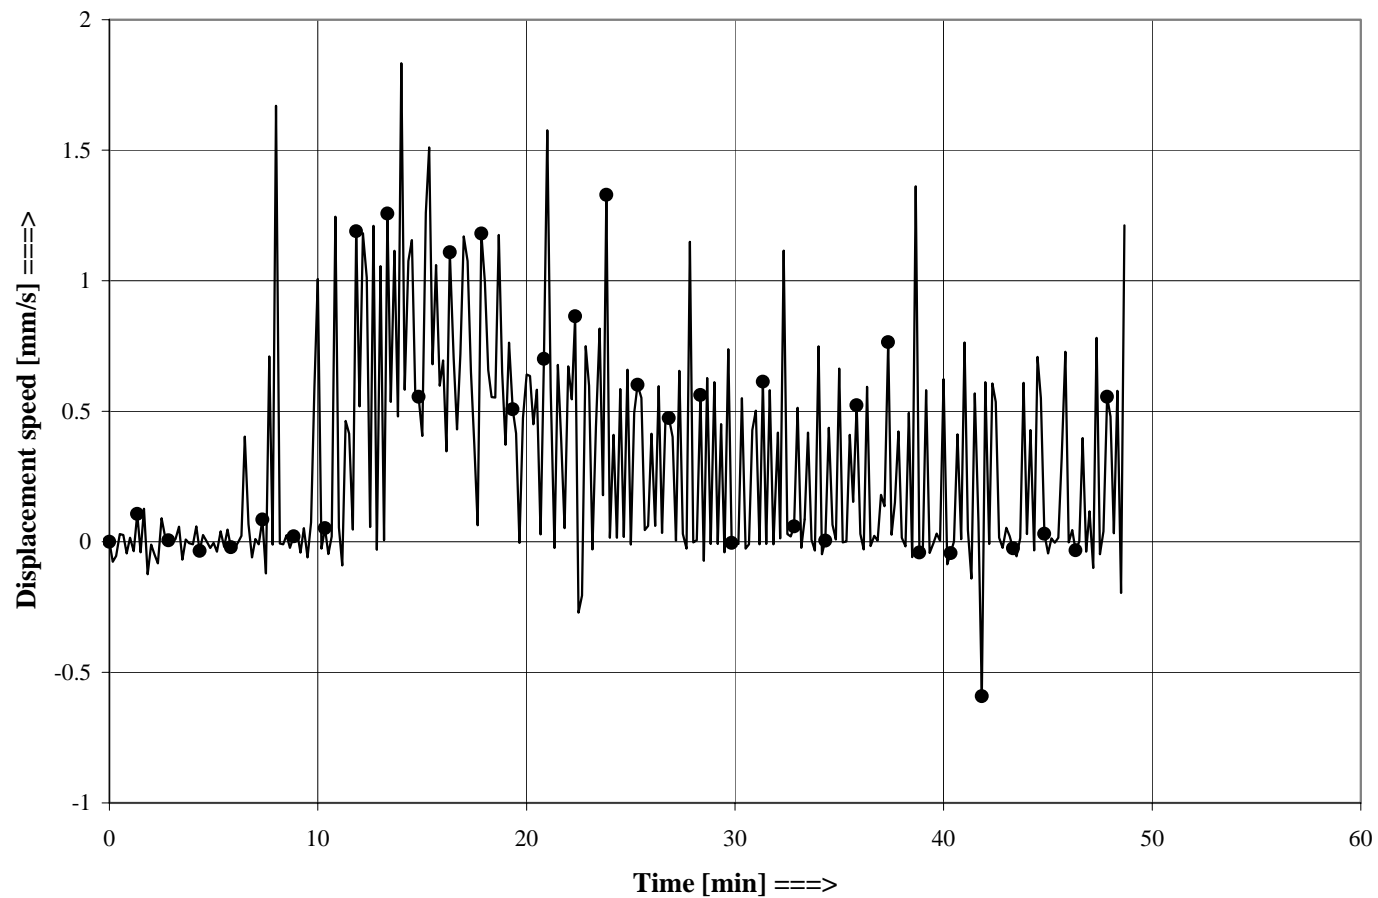


Figure B9: Displacement speed

## C Photographs

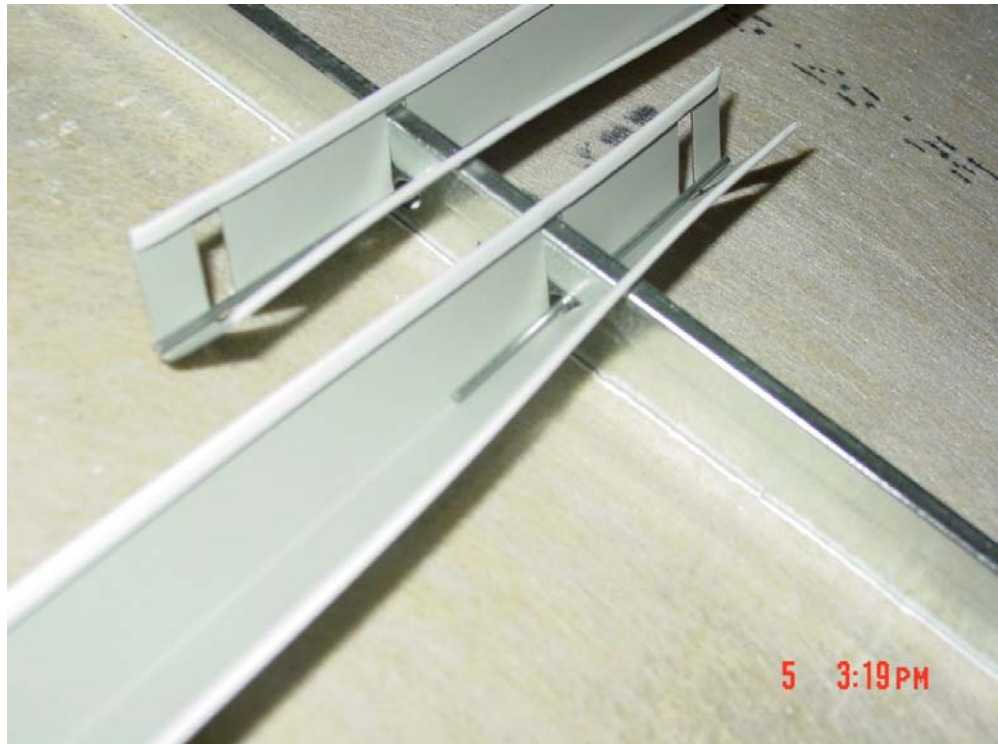


Figure C1 Spacer bar with pin



Figure C2 Specimen from the heated side before the test



Figure C3 Specimen after the test looking into the cavity