


FIT TO SIZE





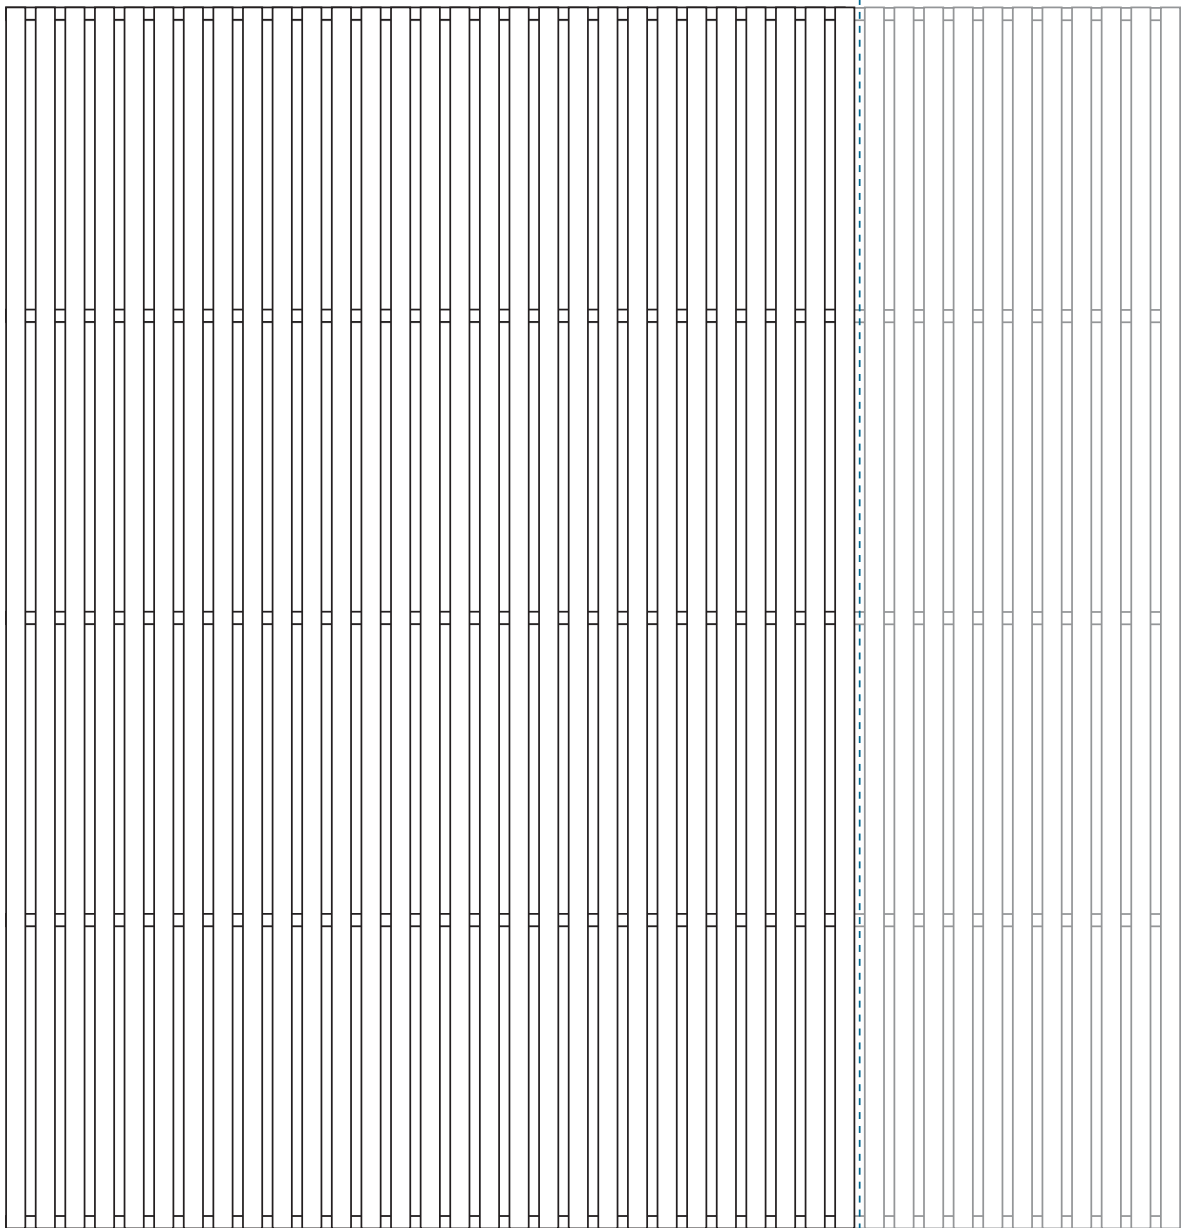


Rockfon[®] Lamella[™]

How to cut to size in width.




Installation

Tool List

Tools	Drill Driver	Utility knife	Saw	Tape Measure	Laser	Level	Pencil
							

1 Measure and cut horizontal profiles.

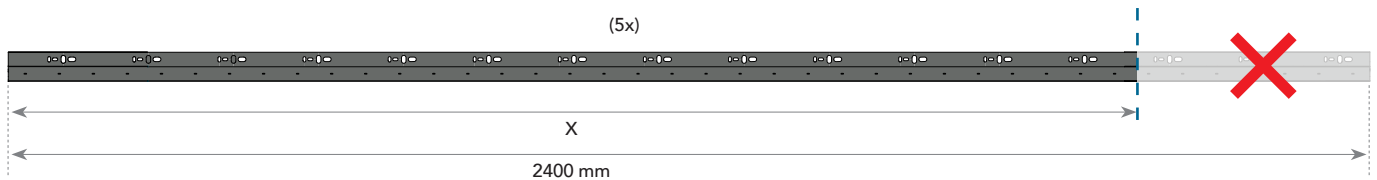

Example: if total desired width of the Rockfon Lamella unit is 2000 mm, cut all the Horizontal Profiles (5x) on the same side to: 1982 mm ($X = \text{total desired width} - 2 \times \text{End profiles width} = 2000 - 2 \times 9 = 1982$).
Cut off = 2400 mm – 1982 mm = 418 mm.

If sides are exposed, you need to finish with an end profile. Deduct 9 mm from the cut length for each end profile needed.

ATTENTION




Deduct 9 mm from the cut length for each exposed side, to leave space for an end profile.

ATTENTION



Remember to flip one of the top/ bottom profiles before cutting, so you cut one of them from the opposite end from the other.


2 Follow standard installation.

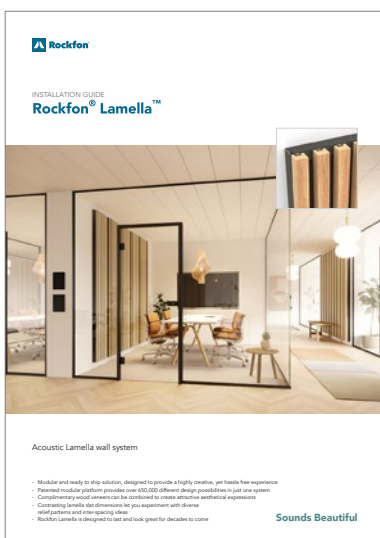


Follow step 1–10 in the original Rockfon Lamella Installation Guide. Note that steps 7 & 8 are only applicable if the width of the Lamella unit is >2418 mm.

3 Cut Rockfon Lamella Sound Absorbing Panel Charcoal.

Cut the Lamella Sound Absorbing Panels Charcoal to match the exact same length as the Horizontal Profiles in step 1.

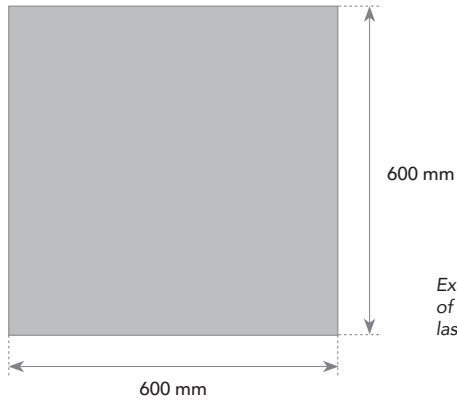

Example: if the Horizontal Profiles have a length of 1982 mm, the accumulated width of the panels should be similar. First use 3 full panels ($3 \times 600 \text{ mm} = 1800 \text{ mm}$) and cut the last panels (4x) to 182 mm ($1982 - 1800 \text{ mm}$).

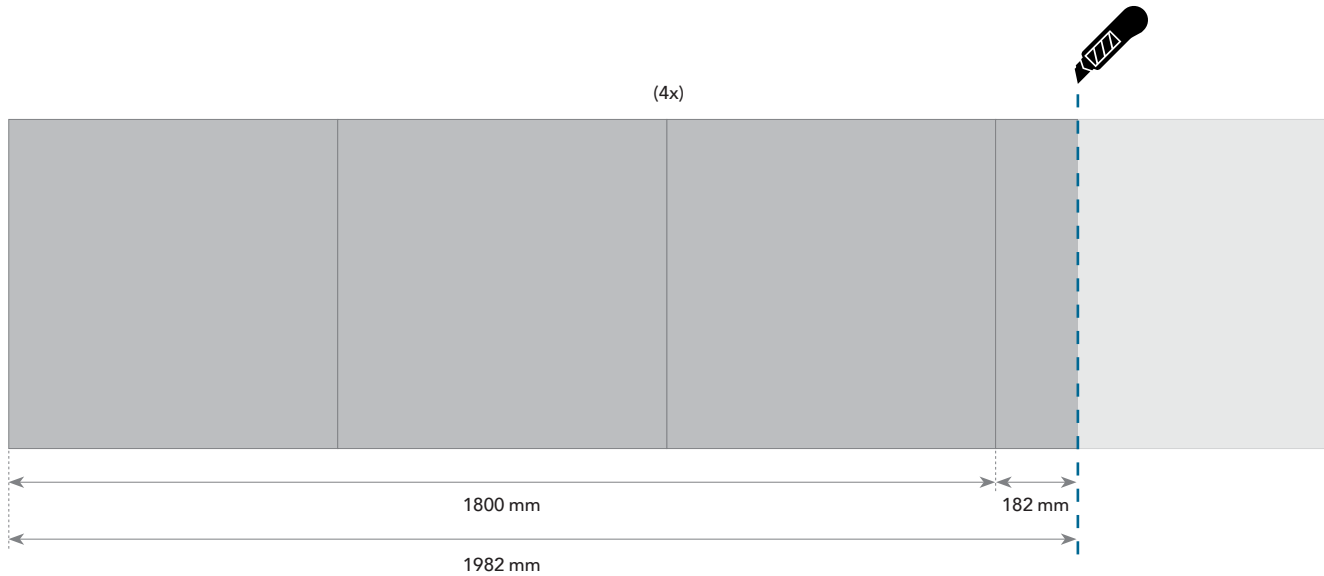

RECOMMENDATIONS




First insert the two outer panels (left and right), followed by the ones in between.

TIP




Cutting is made easy with a sharp knife.

4 Follow standard installation.

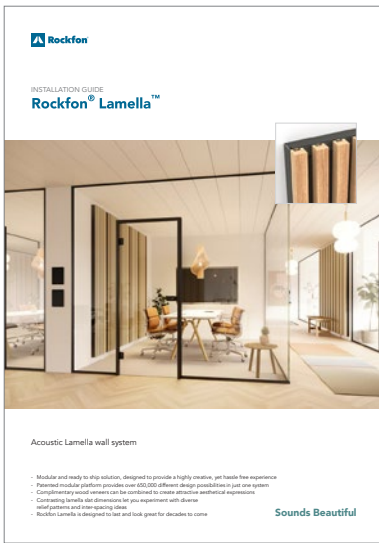


Follow steps 11–13 in the original Rockfon Lamella Installation Guide.

5 Measure distance first clip to first alignment hole.

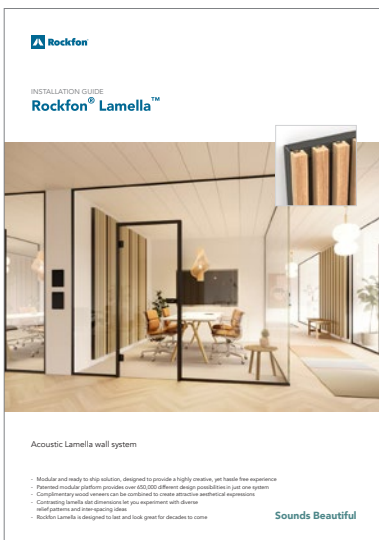


This step only applies to the cut side of the Lamella unit. For the non-cut side, use the Guiding Ruler as described in step 14 of the original Rockfon Lamella Installation Guide.

ATTENTION 

This step only applies to the cut side of the Lamella unit

Measure distance X from the side of the first Mounting Clip to the center of the first alignment hole.

Then mount the remaining clips using the pin on the clips and the holes in the profiles. See original Rockfon installation guide.

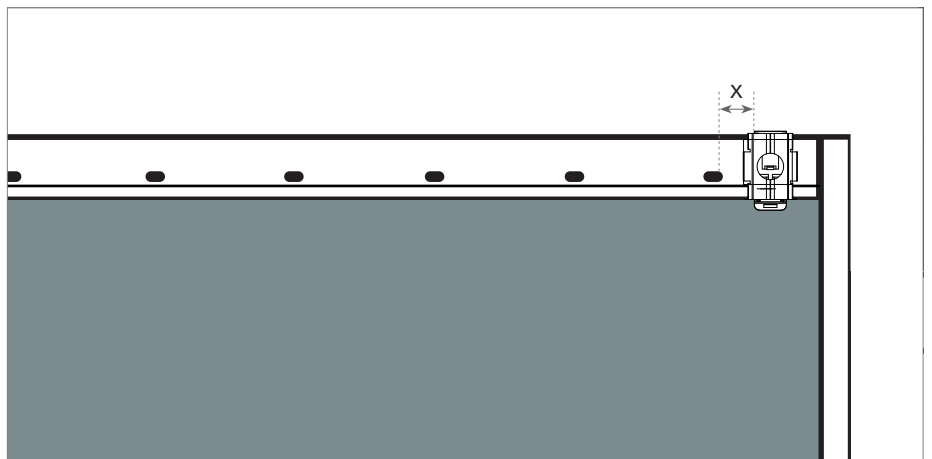

Example: $X = 15 \text{ mm}$.

Example: if X is between 21.1 mm and 51.5 mm , use the -2 mm side of the Guiding Ruler. In all other cases, use the $+2 \text{ mm}$ side of the Guiding Ruler. Use ruler until a clip is aligned with an alignment hole in the profile.

01.2024 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

