


# Rockfon<sup>®</sup> Samson<sup>™</sup>

Datasheet

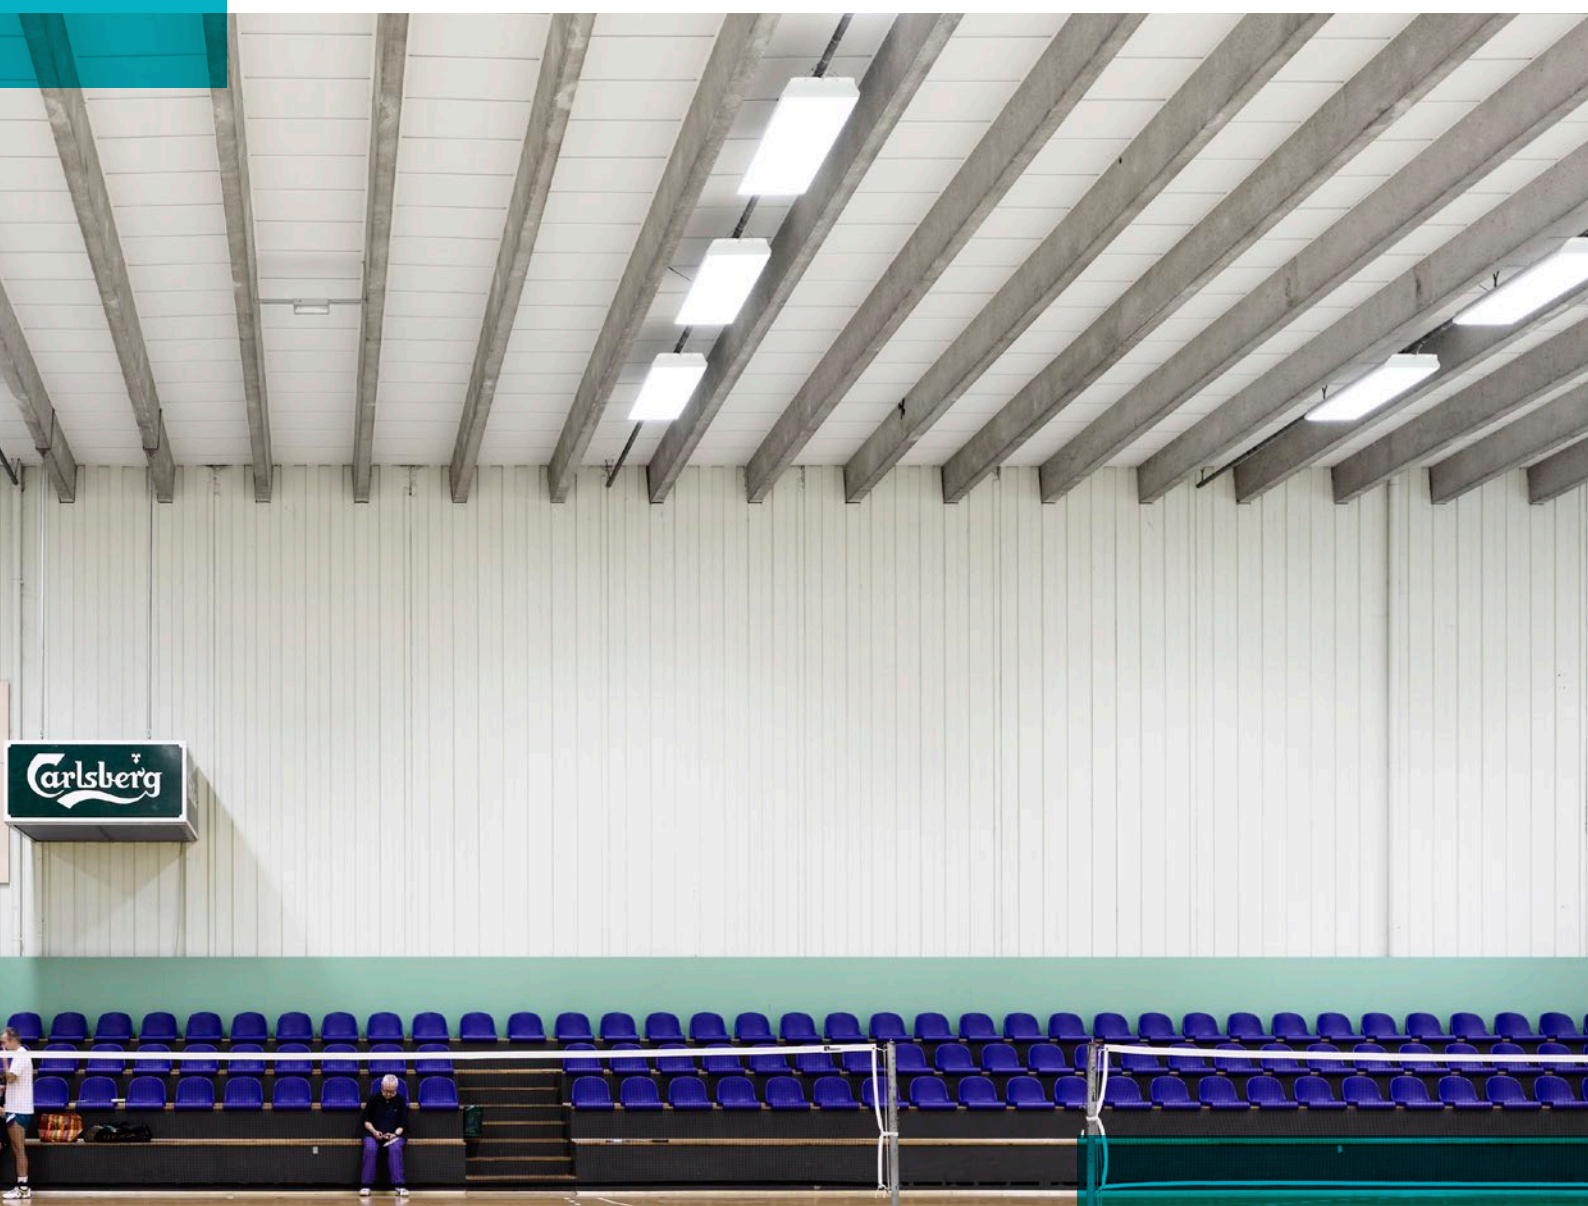

**Sounds Beautiful**

# Rockfon® Samson™



- Highly impact-resistant white woven surface, ideal for high activity level areas such as schools and sports facilities
- Excellent sound absorption for noisy and reverberant areas
- Meets the requirements of maximum impact resistance (Class 1A) when installed in Rockfon System Olympia<sup>Plus</sup> A Impact 1A and Class 2A when installed in Rockfon System T24 A Impact 2A/3A). Rockfon System Olympia<sup>Plus</sup> A Impact 1A meets the requirements of DIN18032 Part 3

## Product Description

- Stone wool tile (40mm)
- Visible side: durable woven surface
- Rear side: back fleece
- Painted edges

## Application Areas

- Education
- Leisure

Edge detail	Module size (mm)	Weight (kg/m <sup>2</sup> )	MS / MS easy access (mm)	Recommended installation System
 A24	600 x 600 x 40	4.1	50 / 200	Rockfon® System T24 A™
		4.1	50 / 200	Rockfon® System HAT A™
		4.1	50 / 200	Rockfon® System T24 A, E ECR™
	1200 x 600 x 40	4.1	50 / 200	Rockfon® System T24 A™
		4.1	50 / 200	Rockfon® System HAT A™
		4.1	50 / 200	Rockfon® System T24 A, E ECR™
		4.1	50 / 200	Rockfon® System T24 A Impact 2A/3A™
		4.1	50 / 200	Rockfon® System T24 A™
	1800 x 600 x 40	4.1	50 / 200	Rockfon® System HAT A™
		4.1	50 / 200	Rockfon® System T24 A, E ECR™
		4.1	50 / 200	Rockfon® System T24 A™
	2400 x 600 x 40	4.1	50 / 200	Rockfon® System HAT A™
		4.1	50 / 200	Rockfon® System T24 A, E ECR™
		4.1	50 / 200	Rockfon® System T24 A™
	1200 x 1200 x 40	4.1	50 / 200	Rockfon® System T24 A™
4.1		50 / 200	Rockfon® System HAT A™	
4.1		50 / 200	Rockfon® System T24 A, E ECR™	
 AEX	1166 x 1166 x 40	4.1	180 / 180	Rockfon® System Olympia Plus A Impact 1A™


MS = Minimum Suspension



## Performance



**Sound absorption**  
 $\alpha_w$ : up to 1.00 (Class A)

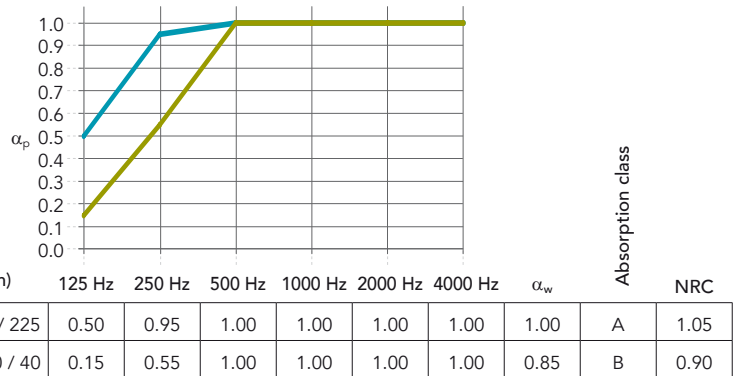

**Reaction to fire**  
 A1



**Fire protection**  
 The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes. Some sizes and edge details of Rockfon Samson can be used with various Chicago Metallic grids and Rockfon systems to create a 60 minutes fire protecting ceiling in accordance with BS 476 Part 21 and Part 23. They can also be used to create a 30 minutes fire protecting membrane ceiling (integrity only) in accordance with BS 476 Part 22.



**Light reflection**  
 72%



**Humidity and sag resistance**  
 Up to 100% RH.  
 No visible deflection in high humidity  
 C/0N



**Cleaning**  
 - Vacuum



**Hygiene**  
 Stone wool provides no sustenance to microorganisms



**Environment**  
 Fully recyclable stone wool  
 The recycled content of Rockfon products is between 29% and 64% according to ISO 14021.  
 Rockfon acoustic solutions are Cradle to Cradle Certified® Silver and Bronze (depending on product type).



**Carbon footprint**  
 4.01 kg of CO2 eq.  
 (cradle to gate based on EPD)



**Indoor environment**  
 A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



**Thermal insulation**  
 Thermal conductivity:  
 $\lambda_D = 37 \text{ mW/mK}$



**Impact resistance**  
 40 mm: Class 1A (Rockfon System Olympia<sup>Plus</sup> A Impact 1A)  
 40 mm: Class 2A (Rockfon System T24 A Impact 2A/3A)  
 Tested in accordance with EN13964-Annex D. Impact resistance classifications confirm the system's capability to withstand incidental or occasional impact. Directly mounted, Rockfon Samson is not recommended for use in areas which are subjected to continuous high levels of impact. The woven surface of Rockfon Samson provides enhanced resistance to perforation, tested in accordance with NF P 08-301.




Rockfon® is a registered trademark  
of the ROCKWOOL Group.

 [linkedin.com/company/Rockfon-as](https://www.linkedin.com/company/Rockfon-as)

 [pinterest.com/Rockfon](https://www.pinterest.com/Rockfon)

 [youtube.com/RockfonOfficial](https://www.youtube.com/RockfonOfficial)

 [facebook.com/RockfonOfficial](https://www.facebook.com/RockfonOfficial)

 [instagram.com/Rockfon\\_Official](https://www.instagram.com/Rockfon_Official)

## Sounds Beautiful

06/2021 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.



**Rockfon**  
ROCKWOOL Limited T/A Rockfon  
14th Floor, Chiswick Tower, 389 Chiswick High Road,  
London W4 4AL  
Tel: +44 (0) 208 222 7457  
[www.rockfon.co.uk](http://www.rockfon.co.uk)