


# Rockfon® Tropic™

Datasheet



# Rockfon® Tropic™

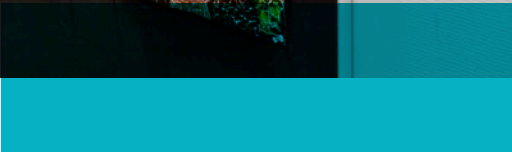



- Smooth attractive white surface for various applications
- Highest Class A sound absorption
- Full range of dimensions in semi-concealed and visible grid options
- Easy to clean with a vacuum

## Product Description

- Stone wool tile
- Visible side: smooth white painted fleece
- Rear side: back fleece
- Painted edges

## Application Areas

- Office
- Education
- Leisure
- Retail

Edge detail	Module size (mm)	Weight (kg/m <sup>2</sup> )	MS / MS easy access (mm)	Recommended installation System
 A15	600 x 600 x 20	2.4	60 / 100	Rockfon® System T15 A™
 A24	600 x 600 x 20	2.4	60 / 100	Rockfon® System T24 A™
	1200 x 600 x 20	2.4	60 / 100	Rockfon® System T24 A™
	1800 x 600 x 20	2.4	60 / 100	Rockfon® System T24 A™
	2400 x 600 x 20	2.4	60 / 100	Rockfon® System T24 A™
	1200 x 1200 x 25	2.5	60 / 100	Rockfon® System T24 A™
 E15	600 x 600 x 20	2.8	58 / 100	Rockfon® System T15 E™
		2.8	100 / 100	Rockfon® System Ultraline E™
	1200 x 300 x 20	2.8	100 / 100	Rockfon® System T15 E™
	1200 x 600 x 20	2.8	58 / 100	Rockfon® System T15 E™
		2.8	100 / 100	Rockfon® System Ultraline E™
	1500 x 300 x 20	2.8	100 / 100	Rockfon® System T15 E™
 E24	600 x 600 x 20	2.8	58 / 100	Rockfon® System T24 E™
	1200 x 300 x 20	2.8	58 / 100	Rockfon® System T24 E™
	1200 x 600 x 20	2.8	58 / 100	Rockfon® System T24 E™
	1500 x 300 x 20	2.8	58 / 100	Rockfon® System T24 E™
	1800 x 300 x 20	2.8	58 / 100	Rockfon® System T24 E™


MS = Minimum Suspension



## Performance



**Sound absorption**  
 $\alpha_w$ : 1.00 (Class A)

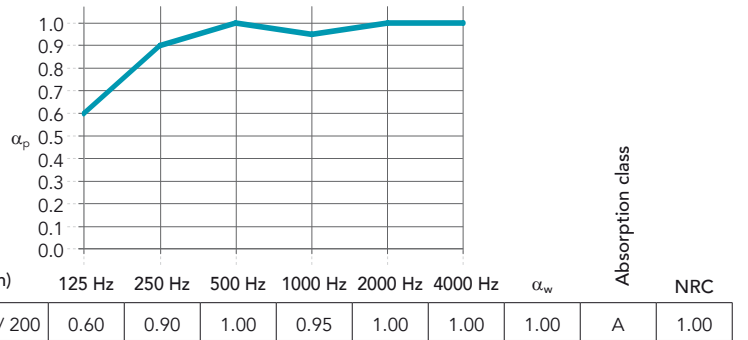

**Reaction to fire**  
 A1



**Fire protection**  
 Some sizes and edge details of Rockfon Tropic can be used with various Chicago Metallic grids and Rockfon systems to create a 30 and/or 60 minutes fire protecting ceiling in accordance with BS 476 Part 21 and Part 23. They can also be used to create a 30 minutes fire protecting membrane ceiling (integrity only) in accordance with BS 476 Part 22.



**Light reflection**  
 86%



**Humidity and sag resistance**  
 Up to 100% RH.  
 No visible deflection in high humidity  
 C/0N



**Cleaning**  
 - Vacuum



**Hygiene**  
 Stone wool provides no sustenance to microorganisms



**Environment**  
 Fully recyclable stone wool  
 The recycled content of Rockfon products is between 29% and 64% according to ISO 14021.  
 Rockfon acoustic solutions are Cradle to Cradle Certified® Silver and Bronze (depending on product type).



**Carbon footprint**  
 2.39 - 2.96 kg of CO2 eq.  
 (cradle to gate based on EPD)



**Indoor environment**  
 A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



Rockfon® is a registered trademark  
of the ROCKWOOL Group.

 [linkedin.com/company/Rockfon-as](https://www.linkedin.com/company/Rockfon-as)

 [pinterest.com/Rockfon](https://www.pinterest.com/Rockfon)

 [youtube.com/RockfonOfficial](https://www.youtube.com/RockfonOfficial)

 [facebook.com/RockfonOfficial](https://www.facebook.com/RockfonOfficial)

 [instagram.com/Rockfon\\_Official](https://www.instagram.com/Rockfon_Official)

## Sounds Beautiful

06/2021 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.



**Rockfon**  
ROCKWOOL Limited T/A Rockfon  
14th Floor, Chiswick Tower, 389 Chiswick High Road,  
London W4 4AL  
Tel: +44 (0) 208 222 7457  
[www.rockfon.co.uk](http://www.rockfon.co.uk)