

Rockfon Artic®


0.75
NRC

Features & Benefits

- Smooth white surface
- Economic solution with standard sound absorption (NRC = 0.75)
- Fire Performance - Class A
- Lightweight panel, easy to carry and install
- Available in square lay-in and tegular

Applications

- Retail
- Corridor
- Break Room
- Waiting Room

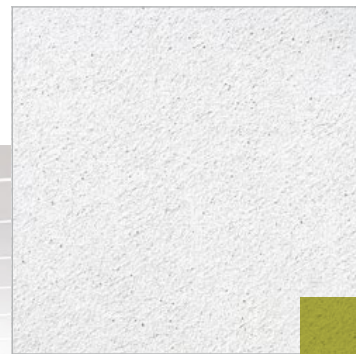

Rockfon ceiling tiles are manufactured using advanced stone wool technology. All stone wool tiles benefit from:



High Acoustic Absorption



Fire Performance - Class A



Moisture and Sag Resistance



Smooth, Modern Aesthetics

Materials and Resources (MR)

- Waste Management Planning
- Interiors Life Cycle Impact Reduction
- Environmental Product Declarations
- Sourcing of Raw Materials
- Material Ingredients
- Waste Management

Indoor Environmental Quality (EQ)

- Low-Emitting Materials ✓
- ✓ Interior Lighting ✓
- ✓ Acoustic Performance ✓

Recycled Content: up to 47%



Standard Panels



Packaging Information

Edge Designation	Item Number	Modular Size (nominal)	NRC	AC	Fire Class	Light Reflectance	Sag Resistance (relative humidity)	Low VOC	lbs/sqft	sqft/carton
<p>Square Lay-In</p>	SQ 600	2' x 2' x 5/8"	0.75	-	A	0.85	up to 100%	✓	0.38	112
	SQ 601	2' x 4' x 5/8"	0.75	-	A	0.85	up to 100%	✓	0.38	112
	SQ 609	20" x 60" x 3/4"	0.75	-	A	0.85	up to 100%	✓	0.45	83.33
	SQ 610	2' x 5' x 3/4"	0.75	-	A	0.85	up to 100%	✓	0.45	100
<p>Square Tegular Narrow</p>	SLN 620	2' x 2' x 5/8"	0.75	-	A	0.85	up to 100%	✓	0.47	56
	SLN 621	2' x 4' x 5/8"	0.75	-	A	0.85	up to 100%	✓	0.47	112
<p>Square Tegular</p>	SL 660	2' x 2' x 5/8"	0.75	-	A	0.85	up to 100%	✓	0.47	56
	SL 661	2' x 4' x 5/8"	0.75	-	A	0.85	up to 100%	✓	0.47	112

15/16" Suspension Systems	9/16" Suspension Systems
200, 1200 and Fire Rated systems	4000, 4500, 4600 and Fire Rated systems
<p>SQ - Square Lay-In SL - Square Tegular</p>	<p>SQ - Square Lay-In (2' x 2' & 2' x 4' only) SLN - Square Tegular Narrow</p> <p>4000 - Tempra 4000 - Tempra 4500 - Ultraline 1/4" reveal 4600 - Ultraline 1/8" reveal</p>



Rockfon Artic® Properties

Material

Stone wool (Mineral Wool) ceiling tiles with factory applied latex paint on glass scrim surface
 ASTM E1264 CLASSIFICATION: Type XX - Stone wool base with membrane-faced overlay, Pattern G



Fire Performance

Surface burning characteristics:
 UL723 (ASTM E84) Flame Spread Index: 0
 Smoke Developed Index (UL Labeled): 5
 CAN/ULC S102 Flame Spread Index: 5
 Smoke Developed Index: 0



Sustainability

Many of Rockfon stone wool acoustic solutions are GREENGUARD Gold low VOC certified and meet the State of California's Department of Public Health Services Standard Practice for Specification Section 01350 (California Section 01350) for testing chemical emissions.

Selected potential applications: LEED, WELL, CHPS, Green Globes, BREEAM Int. and CALGreen



Cleaning

Vacuum



Environment

Up to 47% recycled content. Recycled content based on U.S. manufacturing.



Warranty

30-Year Limited Product Warranty
 See rockfon.com



Thermal Insulation

R Value (BTU Units): 2.2 - 2.6
 RSI Value (Watts Units): 0.39 - 0.46



Hygiene

Stone wool provides no sustenance to microorganisms



GREENGUARD Gold Certified
 for Office and Educational
 Environments

2020 | Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.
 © ROCKWOOL International A/S 2018. All rights reserved.
 ® denotes a trademark that is registered in the United States of America.

082720

Rockfon

4849 S. Austin Ave.
 Chicago, IL 60638 USA

Tel. +1-800-323-7164

Fax. +1-800-222-3744

rockfon.com