![Rockfon® logo]

DATASHEET

Rockfon Hub®

Sounds Beautiful

Rockfon Hub®

- The platform brings multipurpose flexibility to your interiors by creating breakout spaces where people can think, work or talk in peace
- The soft island shapes can be enhanced with a felt frame cover, mood lighting and curtains to create calm or cosy areas where people can work productively without disturbance
- Rockfon Hub® is delivered as a complete kit contributing to easy and hassle-free installation

Product Description

Rockfon Hub® is available in 4 dimensions:

3000 x 4800mm (small) - weight 82.4kg
3600 x 4200mm (medium) - weight 80.1kg
4800 x 4800mm (large) - weight 118.4kg
4800 x 7200mm (extra large) - weight 160.7kg
Black anodized frame in an organic shape.
Felt in three different colors: light grey, dark grey, white.
Pre-selected concealed tiles: white with Rockfon Blanka® or colours with Rockfon Color-all®.

Application Areas

- Office
- Leisure
- Education
- Retail

| Product group	Product image	Component description	Length x Width x Height (mm)	Pcs per pack	Kg per pack
	X	Rockfon Blanka®		10	13,3
		Rockfon Color-all®	600 x 600 x 22	10	13,3
HUB FRS		Frame Profile Straight	1800 x 35 x 110	2	8,2
			2400 x 35 x 110	2	11
			3000 x 35 x 110	2	13,8
			3600 x 35 x 110	2	16,5
HUB FRC		Frame Profile Corner	1066 x 35 x 110	4	9,8
HUB CAS		Carrier Profile	2976 x 40 x 40	1	6
			3576 x 40 x 40	1	7,2
			1200 x 40 x 40	1	2,4
			868 x 40 x 40	1	1,8
HUB CON		Frame Profile Coupling			
HUB SCREW M6		Coupling Screw			
HUB CON		Profile Connector			
		Inter Connector R	-		
		Intersection Clip			
HUB HHSS		M6 Hammer Head Screw			
HUB WIRE		Vertical Wire Set			
		Bracing Wire Set			
HUB GLI		Curtain Rollers			
T24 MR CL&HK		Main runner T24 Click / Hook	3600 x 24 x 38	15	19,5
T24 CT CLICK		Cross tee T24 Click	600 x 24 x 38	45	8,2
HUB FELT		Felt Cover	-		
HUB MOLD		Cutting template		1	0,5

Performance

Sound absorption
α_w: 0.95 (Class A)
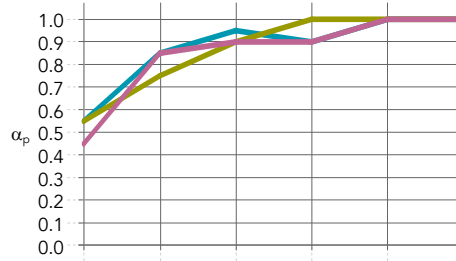
Edge / Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
Blanka X: 22 / 200	0.55	0.85	0.95	0.90	1.00	1.00	0.95	A	0.95
Blanka X: 22 / 1000	0.55	0.75	0.90	1.00	1.00	1.00	0.95	A	0.95
Color-all X: 22 / 200	0.45	0.85	0.90	0.90	1.00	1.00	0.95	A	0.95

Reaction to fire
A1
(tiles and grid components)

Cleaning
- Vacuum

Hygiene
Stone wool provides no sustenance to microorganisms

Load Bearing Capacity
17 kg/m²

Recyclability
Fully recyclable stone wool

Indoor environment
Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1).

Material Health
All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

Colours

Stone - 01 NCS S 2000-N	**Charcoal - 09** NCS S 8500-N
Anthracite - 08 NCS S 7010-R90B	**Concrete - 06** NCS S 6000-N
White NCS S 0500-N	

Storm - 48 NCS S 6020-R90B	**Azure - 47** NCS S 3020-B
Sage - 31 NCS S 3010-G10Y	**Eucalyptus - 32** NCS S 6020-B90G

NCS codes are closest colour match. The actual colour of the islands may deviate slightly from printed colours due to the texture of the surface and the underlying colour of stone wool.

Felt Cover

White   Light grey   Dark grey

Rockfon production facilities are certified according to the ISO 9001 management system standard.

Sounds Beautiful

Part of ROCKWOOL Group / **www.rockfon.co.uk**