


## Rockfon<sup>®</sup> System T24 X<sup>™</sup>

### System Description

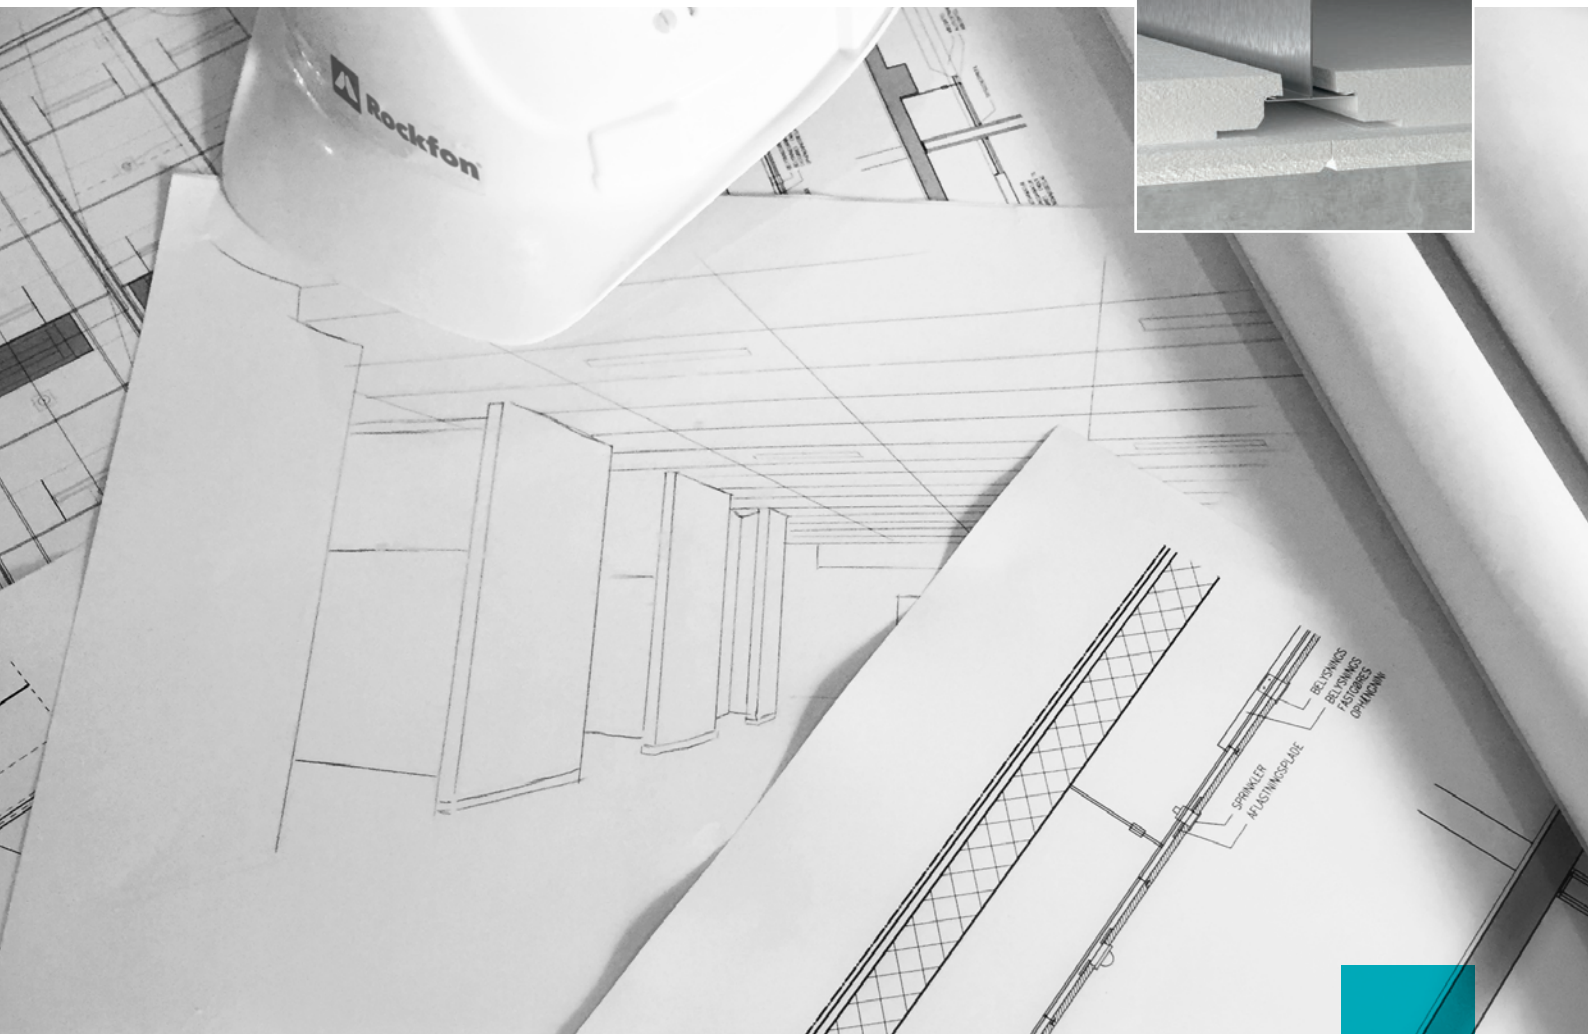


Concealed ceiling system  
Unbroken look

- Elegant, unbroken ceiling expression
- Easy and fast to install
- Low installation height and full de-mountability
- Easy integration of services

## Description

**Rockfon System T24 X** is a concealed ceiling system that provides an elegant, unbroken ceiling expression and is used with X-edge tiles. The system can either be installed as suspended ceiling at the desired height using the **Chicago Metallic T24 3830** or mounted directly on the soffit by using direct fixing brackets. In Rockfon System T24 X the Chicago Metallic T24 3830 grid comes with a click system providing easy and fast mounting and demounting. The T profiles have a width of 24 mm, and all components are made of galvanised steel with a smooth, white surface hidden by Rockfon X-edge tiles. The system includes main runners, cross tees, hangers and other necessary components. The main runners and


cross tees have a uniform height of 38 mm, ensuring stability and easier integration of services. A number of accessories, lighting and ventilation solutions have been developed for Rockfon System T24 X. The system provides full demountability of the mounted tiles. The system is characterized in that, during mounting or de-mounting, the tiles never come over the grid system where there is often installations. Rockfon X-edge tiles are available in different module sizes (see overview on page 3). The grid layout to be used depends on the choice of the module size (see layout possibilities on page 5).

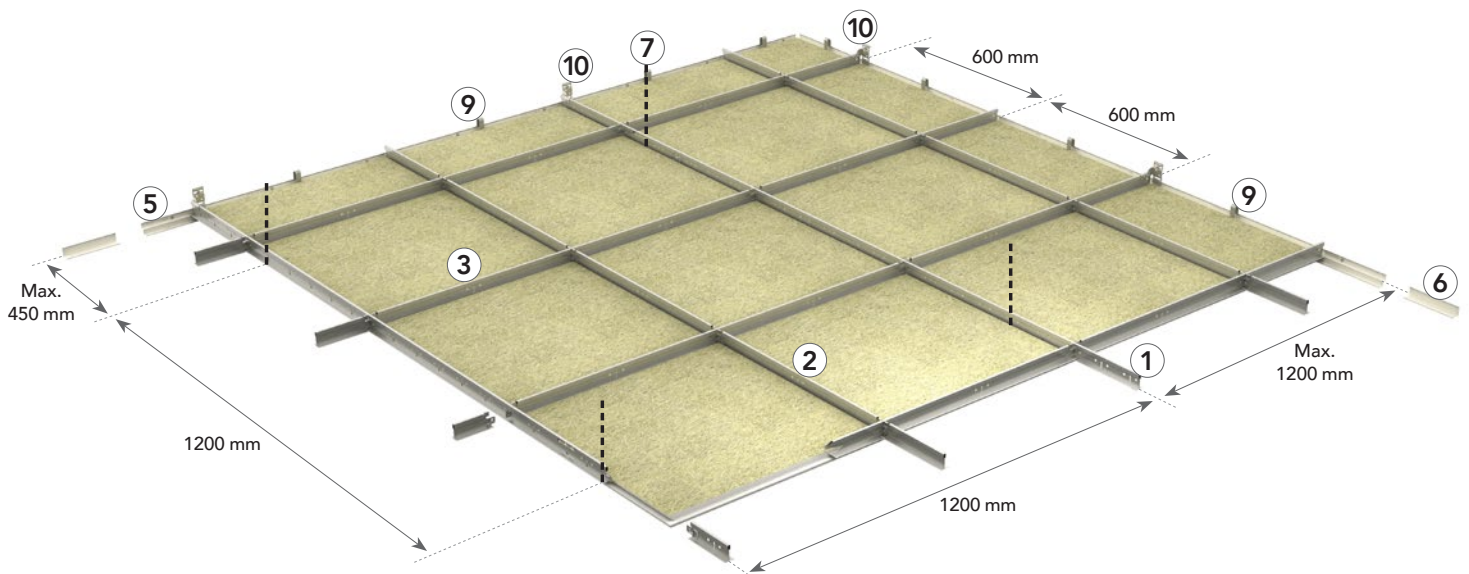

To make sure that the tiles of a Rockfon System T24 X are perfectly positioned, we recommend the use of the wall spring fix.



To secure the squariness of the Rockfon System T24 X it is recommended to use a wall bracket on every main runner and every second cross tee.

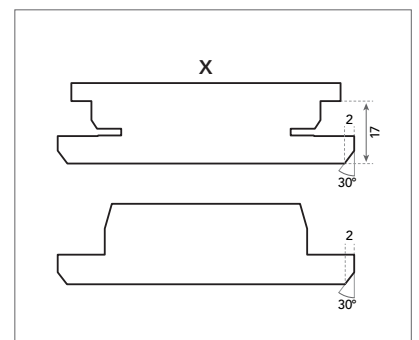

Concealed grid system with the symmetric X-edge ensuring fast mounting in both direction.


## System components and consumption guide

Tile	Chicago Metallic T24 3830				Wall angles		Accessories				
	1	2	3	4	5	6	7	8	9	10	
-	Main runner T24 Click 3600	Cross tee T24 Click 600	Cross tee T24 Click 1200	Cross tee T24 Click 1800	W Shadow moulding wall angle	Perimeter wall angle trim	Hanger	Direct fixing bracket	Wall spring fixt	Wall & bridging bracket	
Dimensions (mm)	Consumption/m <sup>2</sup>										
600 x 600	2,78 pcs/m <sup>2</sup>	0,83 lm/m <sup>2</sup>	0,83 lm/m <sup>2</sup>	1,67 lm/m <sup>2</sup>	-	1)	1)	0,70 pcs/m <sup>2</sup>	0,70 pcs/m <sup>2</sup>	2)	1)
1200 x 600	1,39 pcs/m <sup>2</sup>	0,83 lm/m <sup>2</sup>	-	1,67 lm/m <sup>2</sup>	-	1)	1)	0,70 pcs/m <sup>2</sup>	0,70 pcs/m <sup>2</sup>	2)	1)
1800 x 600	0,93 pcs/m <sup>2</sup>	0,56 lm/m <sup>2</sup>	-	-	1,67 lm/m <sup>2</sup>	1)	1)	0,70 pcs/m <sup>2</sup>	0,70 pcs/m <sup>2</sup>	2)	1)

1) Consumption depends on room size.

2) Wall spring fixt is used to block the tile. When wall spring fixt is used, make sure there is enough space between the tile and the wall to insert the spring. Use one spring per tile.

### Tile - X Edge

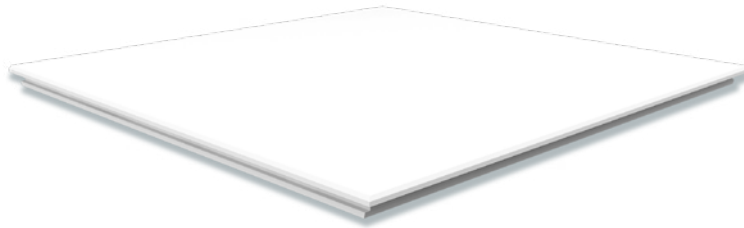

### Chicago Metallic T24 3830

1. Main runner T24 Click 3600



2. Cross tee T24 Click 600



3. Cross tee T24 Click 900



4. Cross tee T24 Click 1800



### Wall angles

5. W Shadow moulding wall angle



6. Perimeter wall angle trim



### Accessories

7. Hanger



8. Direct fixing bracket



9. Wall spring fixt



10. Wall & bridging bracket



## Performance



### System load bearing capacity

	Max. Load (kg/m <sup>2</sup> )
Hanger distance (mm)	Max. 3,3 mm deflection
1200	11



### Corrosion resistance

Chicago Metallic grids are manufactured from high quality hot dip galvanised steel with a coloured capping of pre-painted hot dip galvanised steel. It resists corrosion and it can be used in standard humid environments.



### Demountability

Tiles mounted in Rockfon System T24 X are fully demountable.



### Fire resistance

Some Rockfon ceiling systems have been tested and classified in accordance with European norm EN 13501-2 and/or national norms. Please contact Rockfon.

## Compatible Tiles Overview

Rockfon System T24 X is available with the following Rockfon tiles:

		Dimensions (mm)		
Tiles	Thickness (mm)	600 x 600	1200 x 600	1800 x 600
Rockfon Blanka	22	•	•	•
Rockfon Color-all	22	•	•	•
Rockfon MediCare Plus	22	•	•	
Rockfon Sonar	22	•	•	•


*Other dimensions can be installed in Rockfon System T24 X. Please contact Rockfon.*

## Grid Installation

### Grid layout and hanger location



Rockfon X-edge tiles can be installed in Rockfon System T24 X.

Some layout options are shown below depending on the size of the tile.

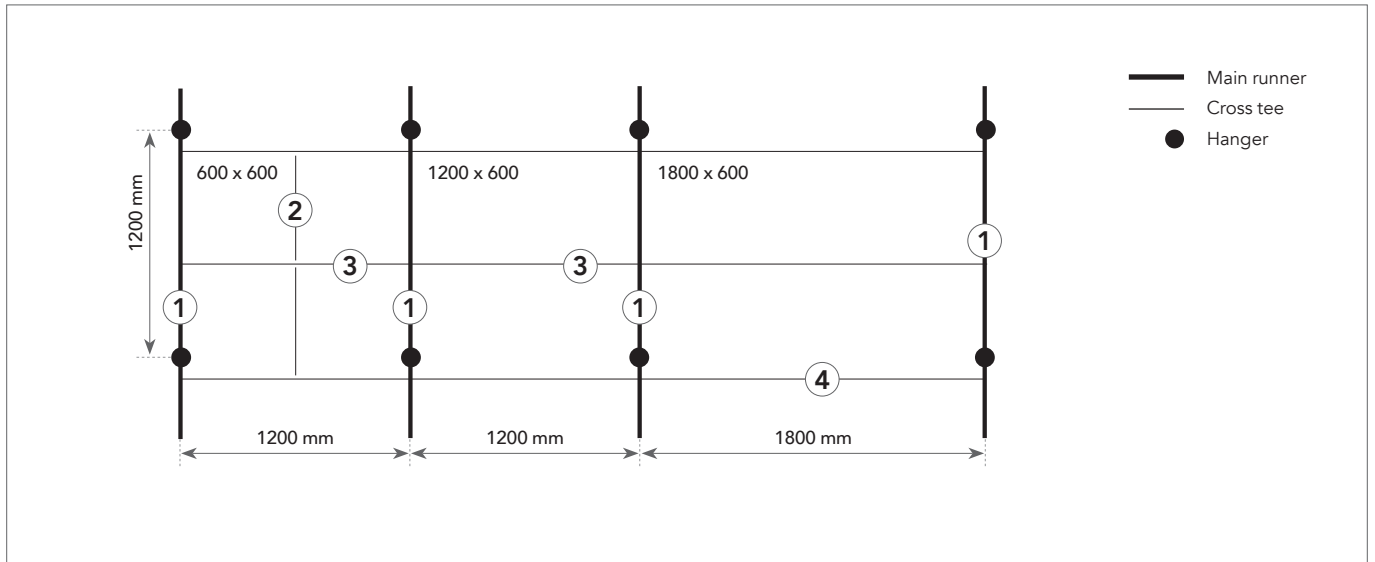


### Installation requirements

During and after grid installation, it is important to check that T profiles are perfectly aligned horizontally. A maximum level difference of +/- 1 mm is recommended between profiles and should not be added. This tolerance is valid for all directions.

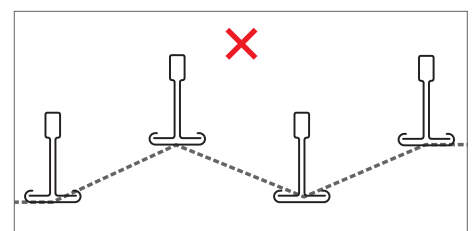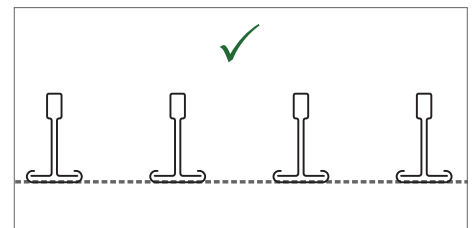


It is also important to check the squareness of the angles between the main runners and cross tees. This can be easily done by comparing the measurements of the two diagonals. See recommended tolerances on the drawings to the right.

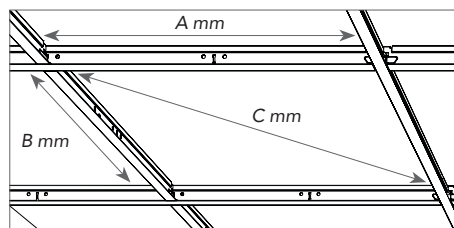


Dimensions (A x B)	Diagonal (C)	Tolerance
mm		
600 x 600	814,6	+/- 0,5
1200 x 600	1309,5	
1800 x 600	1867,1	


## Tile Installation

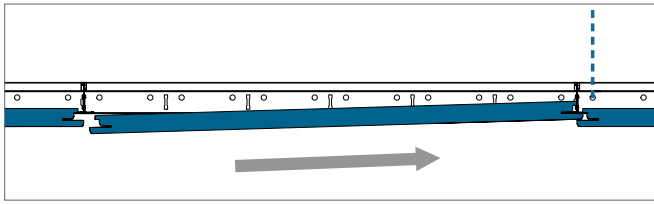


Slide the X edge of the tile into the T profile.

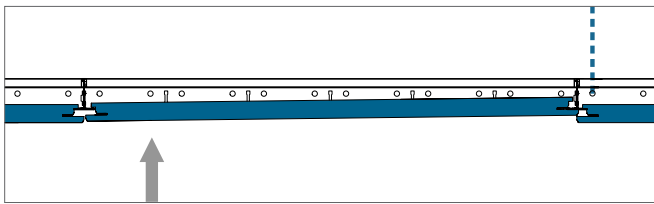

Lift the upper side of the opposite X edge of the tile above the T profile.

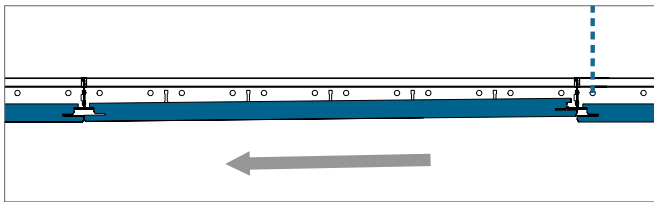

Pull the tile back.

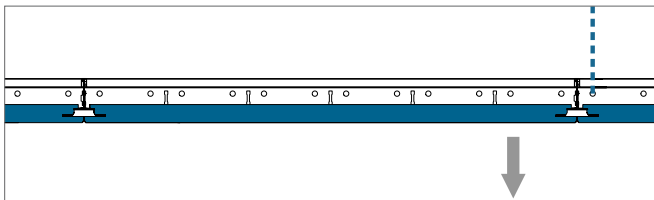


Drop the tile carefully into position.

## Minimum installation depth (mm)

Tiles mounted in Rockfon System T24 X give full demountability. The system is characterized in that, during mounting or de-mounting, the tiles never come over the grid system where there is often installations.


The installation depth is defined as the distance from the underside of the tile to the underside of the substrate, where the hangers are fixed. D is the minimum installation depth for easy tile installation and demountability.

Mounting method	D = Minimum installation depth
Direct fixing	96 mm; 116 mm
T profiles with hangers	126 mm

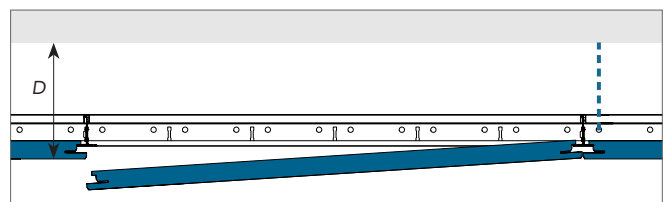


## Perimeter Finish Options


Below are examples of perimeter finishing. Further details can be found on [en.rockfon.international](https://en.rockfon.international)

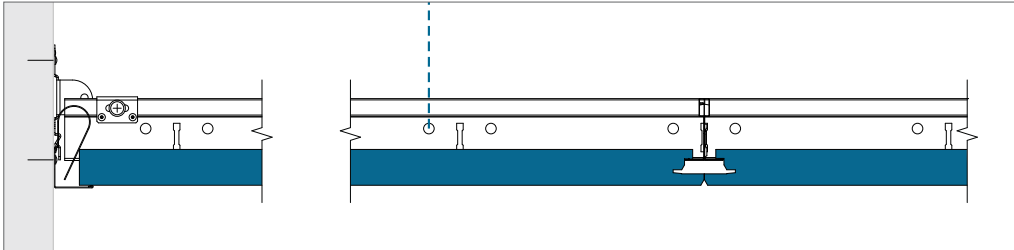

*Perimeter finish with wall angle trim.*

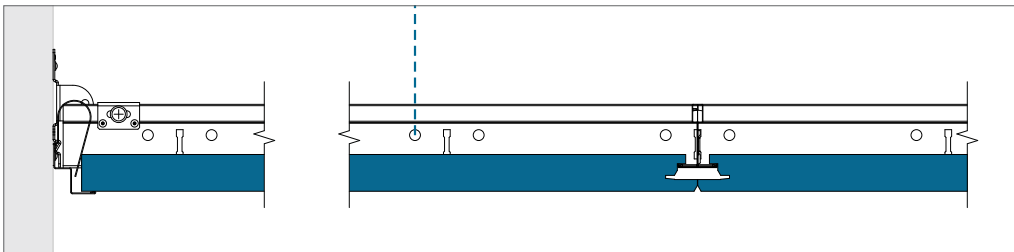

*Perimeter finish with W shadow moulding wall angle.*

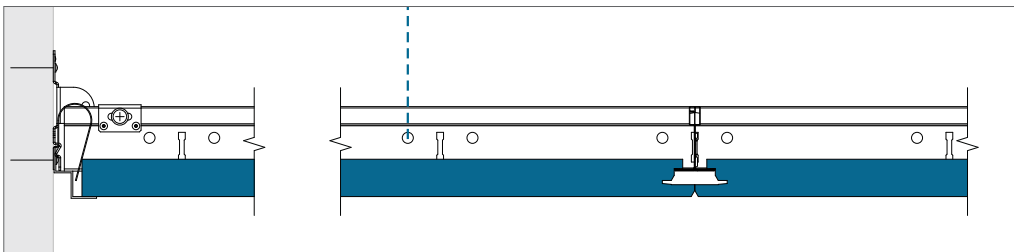

*Perimeter finish with aluminium W shadow moulding wall angle.*

## Service integration

**Rockfon ceiling tiles are easy to cut and therefore it is very easy to integrate service installations in our ceiling tiles. The cut-outs can be made with a simple utility knife.**

When the system is installed to bear load, Rockfon recommends using a yoke or extra support arms that spread the weight of the service installation. Please be aware that, when installing a yoke or support arms, the panel of Rockfon System T24 X is supported by the grid on only two sides. The size of the yoke should not be bigger than module 600 x 600 mm and the use of extra hangers to overcome deflection in the ceiling system is strongly recommended.

When using support arms to spread the weight of the installation, Rockfon recommends spanning maximum 600 mm and the usage of extra hangers to overcome deflection in the ceiling system.

When installing a modular lighting fixture in Rockfon System T24 X please be aware of the special edge design and module size of this solution. Because of the ceiling tile design, a special type of luminaire should be chosen in order to create an esthetically pleasing and well leveled ceiling surface. The actual size of the ceiling tile is nearly its module size and the front surface of the ceiling tile sits approx. 16 mm below the front of the T-grid.

### Planning

A proper planning of the jobsite will result in less re-work and less ceiling tile damages. Rockfon recommends discussing the jobsite planning thoroughly and well in advance with other installers that have to work in or near the suspended ceiling. By doing so damaged ceiling tiles and dirty spots on the finished ceiling surface can be avoided, which reduces costs on the jobsite.

### Overview load bearing capacity

	Weight of installations		
	< 0,25 kg/pcs	0,25 ≥ 3,0 kg/pcs	> 3,0 kg/pcs
Small service integration; Spot- or downlight, speaker, ventilation etc.	Drawing A	Drawing B	Suspend separately
Big service integration; Downlight, speaker, ventilation, etc.	Drawing A	Drawing B	Suspend separately
Modular lighting- or ventilation fixture	Drawing C; System load bearing capacity (if evenly distributed over grid in kg/m <sup>2</sup> )		


When installing services in Rockfon System T24 X you should always follow local building regulations if more strict than the load bearing capacity constraints Rockfon recommends in the above table.

Contact your local Rockfon technical service for more information on suitable lighting fixtures and accessories and availability of CAD drawings of the different services integrated in Rockfon System T24 X. Special solutions with integrated services are, if available, shown on page 12 of this document; 'Tools'.



### Drawing A


The integration of a spotlight, smoke detector, speaker, etc. (weighing < 0,25 kg/pcs).

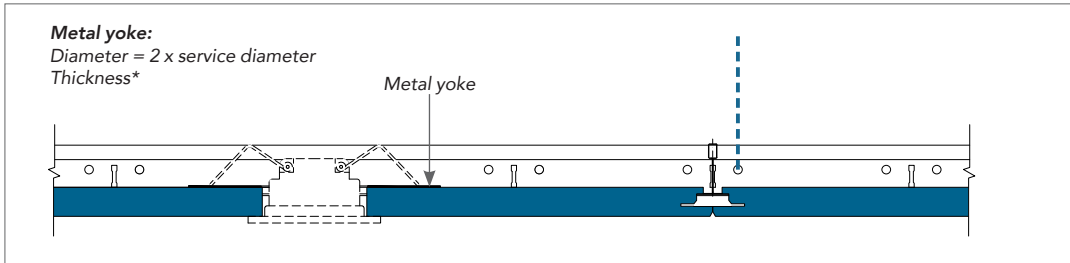

### Drawing B

The integration of a down-, spotlight, smoke detector, loud speaker, etc. (weighing  $0,25 \geq 3,0$  kg/pcs).


Usage of a plywood yoke to spread the load on the back of the tile (as shown in the detail) or usage of support arms to spread the load to the grid system is strongly recommended. The use of extra hangers to avoid deflection is strongly recommended.

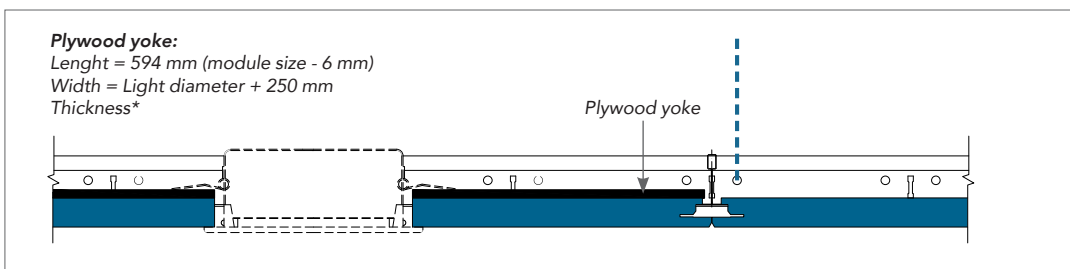

\* The thickness of the plywood or metal yoke needs to be adapted in function of the weight, size and position of your service integration (e.g. downlight or speaker). The Plywood or metal yoke itself may not deflect after installing your service integration.

### Drawing C

The integration of a modular lighting fixture or air vent (evenly distributed over grid), weighing max. the system loading capacity. It is strongly recommended to suspend the service integrated surface separately with extra hangers.

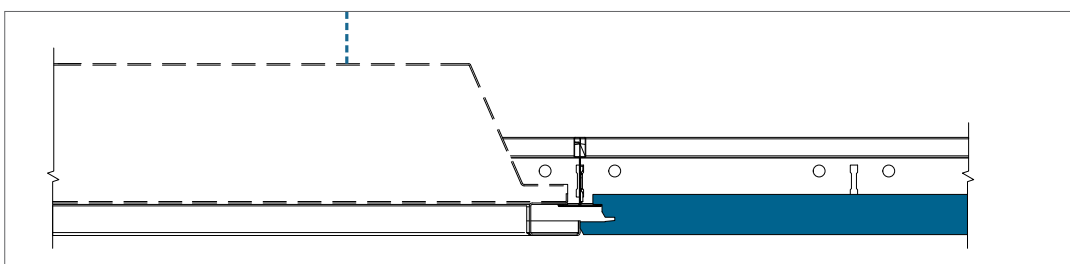


## Specific Solutions

### Hold Down Clip

For maintaining tiles in place, Rockfon offers a range of hold-on clips. In smaller rooms, hallways, stairwells, etc. which can be exposed to pressure differences between the ceiling void and space, it is recommended to ensure ceiling tiles with clip at the back. This is also recommended for cleaning purposes.

For more info on our hold down clips please consult our Hold Down Clips brochure.

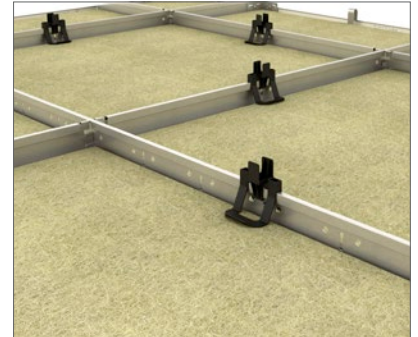


### Light frame

Made exclusively for our Rockfon System T24 X, the easy to mount light frame for our X-edge concealed ceiling tile securely fits into the grid, providing an aesthetic and practical finish. It allows for the easy installation of both a light frame and other important service integration without compromising the visual finish of the total ceiling, leaving no gaps between the light frame and the X-edge tile.



### X-edge knife

Installing the perimeter tiles can be a hassle, due to cross tees and perimeter trim sitting too close to each other. This specially developed X-edge knife gives you an extra 25 mm installation space. By cutting off (a piece of) the backside of the tile, you will be able to slide the tile over your cross tees, install it and slide it back on to your perimeter trim.

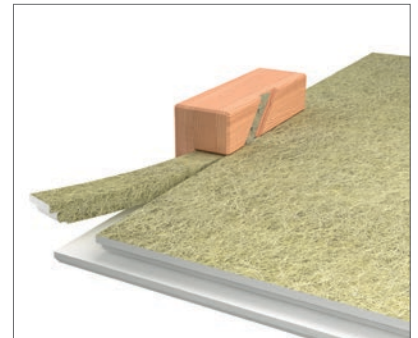

## General installation recommendations

### Junction between ceiling and wall or other vertical surface

The perimeter trim should be fastened to vertical surfaces at the required level using appropriate fixings replace by every 300-450 mm centres. Ensure that butt joints between adjoining lengths of trim are neat and that the trim is free from kinks and remains true and level. For the best aesthetics, use as long a length of trim as possible. The minimum recommended cut length is 300 mm.

### Timber trims, timber shadow battens and metal

Shadow mouldings should not be used with fire resisting/protecting ceilings.

### Junction between ceiling and curved vertical surface

The use of a preformed curved perimeter trim is the most appropriate method. Rockfon can provide details of curved perimeter trims on request.

### Corners

Perimeter trims should be neatly mitred at all corner joints. Overlap mitres are acceptable on metal trims on internal corner joints unless specified otherwise.

### Suspension grid

Unless specified otherwise, the ceiling should be set out symmetrically and where possible, perimeter tiles should be greater than 200 mm in width. The hangers should be fastened with appropriate top fixings and to the main runners at 1200 mm centres (or less with greater load).

Main runners should be positioned at 1200 mm centres for 600 x 600 mm and 1200 x 600 mm module sizes. For 1800 x 600 mm module size, main runners are installed at 1800 mm centres.

For proper grid installation, ensure the T profiles are perfectly aligned, horizontally and diagonals of modules are equal (see requirements and tolerances on page 5). Main runner joints should be staggered and there should be a hanger positioned within 150 mm of the fire expansion element/cut-out and within 450 mm of the end of the main runner where it terminates at a perimeter.

Additional hangers may be necessary to support the weight of ceiling services. When using direct hangers, a fixing nail should be used to lock the hanger on to the bulb of the main runner.

### Tiles

It is recommended to use clean nitrile or PU coated gloves when installing Rockfon tiles in order to avoid finger prints and pollution of the surface.

Cutting is made easily with a sharp knife. All off-cuts and holes must be treated according to local Building Regulations.


For an optimised work environment, we recommend installers always observe common work practices and follow the installation advise as shown on our packaging.

Mounting of 1800 x 600 mm tiles is recommended to be done by two persons.


**Note!** Certain smooth matt surfaces are directional. To ensure consistency of the finished ceiling, it is important that all tiles are installed in one direction indicated by the arrow printed on the back of each tile.

## Tools


Rockfon has developed specific tools that are available on [en.rockfon.international](http://en.rockfon.international)

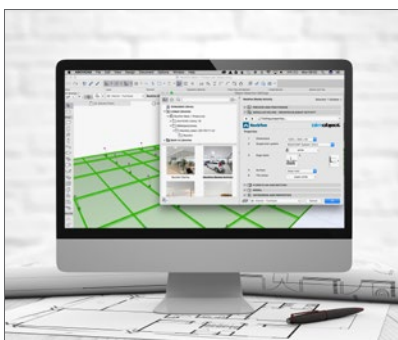

Visit our online CAD Library or BIM portal to assist you in your project design.

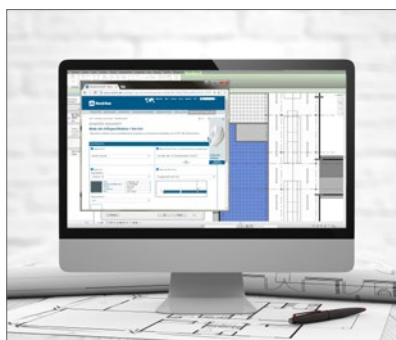

Generate specification texts for our products on our website.

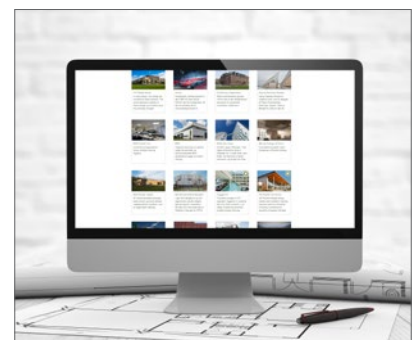

Explore our vast library of reference projects on our website.

Rockfon® is a registered trademark  
of the ROCKWOOL Group.

 [linkedin.com/company/Rockfon-as](https://www.linkedin.com/company/Rockfon-as)

 [pinterest.com/Rockfon](https://www.pinterest.com/Rockfon)

 [youtube.com/RockfonOfficial](https://www.youtube.com/RockfonOfficial)

 [facebook.com/RockfonOfficial](https://www.facebook.com/RockfonOfficial)

 [instagram.com/Rockfon\\_Official](https://www.instagram.com/Rockfon_Official)

04.2022 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on  
license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product  
technology without prior notice. Rockfon accepts no responsibility for printing errors.

## Sounds Beautiful

### Rockfon Singapore

ROCKWOOL Building Materials  
(Singapore) Pte Ltd.  
No. 7, Tuas Avenue 1  
Jurong Town,  
Singapore 639492  
Tel: (+65) 6861 4722  
Fax: (+65) 6862 3533  
E-mail: [enquiry@rockfon.com](mailto:enquiry@rockfon.com)  
[en.rockfon.international](http://en.rockfon.international)

### Rockfon Hong Kong

ROCKWOOL Building Materials  
(Hong Kong) Ltd.  
Unit 301-2, 3/F, Koon Wah Building,  
No.2 Yuen Shun Circuit,  
Yuen Chau Kok, Shatin,  
N.T., Hong Kong  
Tel: (+852) 2576-6117  
Mobile: (+852) 9161-7924  
E-mail: [enquiry@rockfon.com](mailto:enquiry@rockfon.com)  
[en.rockfon.international](http://en.rockfon.international)

### Rockfon

ROCKWOOL Middle East FZE  
Office 139, Building 6WB, DAFZA  
P. O. Box 293585, Dubai, UAE  
  
Tel: +971-4-214-6280  
E-mail: [rockfonme@rockfon.com](mailto:rockfonme@rockfon.com)  
[en.rockfon.international](http://en.rockfon.international)

### Rockfon

ROCKWOOL France S.A.S.  
111, rue du Château des Rentiers  
75013 Paris  
  
Tel: +33 1 40 77 82 82  
Fax.: +33 1 45 86 77 90  
E-mail: [info@rockfon.fr](mailto:info@rockfon.fr)  
[www.rockfon.fr](http://www.rockfon.fr)

