

DATASHEET

# Rockfon Blanka® dB 35



**Sounds Beautiful**

# Rockfon Blanka® dB 35







- Combines room-to-room sound insulation as well as good sound absorption for a flexible office layout where confidentiality is not an issue
- Made from a 25mm stone wool core with a high performance membrane on the back which reduces the transmission of noise from room-to-room
- A deep-matt, smooth, super-white surface finish with enhanced durability making it more resistant to dirt and everyday wear and tear
- Basic range of formats in semi-concealed and visible grid options
- Light weight sound insulating tile, easy to install/cut and clean with a vacuum or damp cloth

## Product Description

- Stone wool tile
- Visible side: smooth, deep-matt and super-white painted fleece
- Rear side: high-performance membrane
- Durable painted edges

## Application Areas

- Office
- Healthcare
- Education

Edge detail	Module size (mm)	Weight (kg/m <sup>2</sup> )	Recommended installation system	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	A1-C4 Full life cycle impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*
 A24	600 x 600 x 25	3.4	Rockfon® System dB T24 A, E™	36%		3.65	4.62
	1200 x 600 x 25		Rockfon® System dB T24 A, E™				
 E15	600 x 600 x 25	3.4	Rockfon® System T15 E™	36%		3.65	4.62
	1200 x 600 x 25		Rockfon® System T15 E™				
 E24	600 x 600 x 25	3.4	Rockfon® System dB T24 A, E™	36%		3.65	4.62
	1200 x 600 x 25		Rockfon® System dB T24 A, E™				

\* For full environmental impact disclosure, see our product EPDs available on [rockfon.link/int-epd](https://rockfon.link/int-epd). Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



## Performance



**Sound absorption**  
 $\alpha_w$ : 0.80 (Class B)




**Direct sound insulation**  
 $R_w$  = 19 dB



**Room to room sound insulation**  
 $D_{n,f,w}$  = 35 dB

The sound insulation properties ( $R_w$ ,  $D_{n,f,w}$ ) presented in the datasheet represent A-edge tiles.

\*) Values obtained on the basis of theoretical analysis.

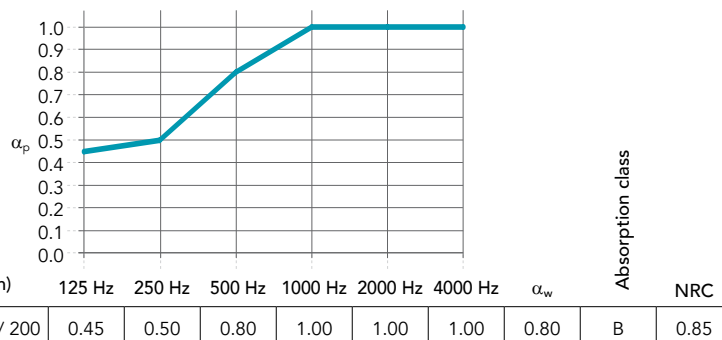

**Reaction to fire**  
 A2-s1,d0



**Light reflection and light diffusion**  
 87% light reflection  
 >99% light diffusion



**Humidity and sag resistance**  
 Up to 100% RH.  
 No visible deflection in high humidity.  
 C/0N



**Cleaning**  
 - Vacuum  
 - Damp cloth



**Hygiene**  
 Stone wool provides no sustenance to microorganisms



**Surface durability**  
 Enhanced durability and dirt resistance.  
 Wet-scrub resistance: Class 4

The wet-scrub resistance is tested in accordance with EN ISO 11998:2006 and rated following EN 12720:2009+A1:2013 scale going from 1 to 5, where 5 is the best.



**Visual appearance**  
 Super-white surface  
 L value: 94.5  
 The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).

Deep matt surface, perfect in critical side-light  
 Gloss: 0.8 gloss unit at 85° angle  
 The gloss of the product is tested in accordance with ISO 2813.



**Recyclability**  
 Fully recyclable stone wool



**Indoor environment**  
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



**Material Health**  
 All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

# Sounds Beautiful

