


## MEASUREMENT OF SOUND ABSORPTION IN A REVERBERATION ROOM ACCORDING TO ISO 354:2003



principal: Rockfon, Rockwool A/S

Type Pacific, panel thickness 15 mm, production date 17 – 02 – 2012, construction height 200 mm

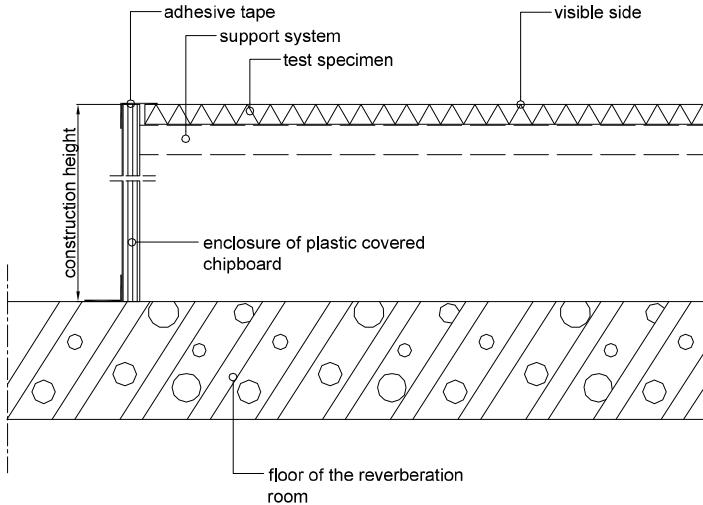

A 2276-1E RvA file: a2276 RA, file: a2276 Er# 1413-1448 F# 1449-1484 A# 1485 T<sub>1</sub> = 17,6 °C T<sub>2</sub> = 17,8 °C P<sub>1</sub> = 101,0 kPa p<sub>2</sub> = 101,0 kPa h<sub>1</sub> = 51,0 % h<sub>2</sub> = 50,5 %


volume reverberation room: 214 m<sup>3</sup>

surface area sample: 10,8 m<sup>2</sup>

height of the construction: 0,200 m

measured at: Peutz Laboratory for Acoustics


signal: broad-band noise



bandwidth: 1/3 octave

$\alpha_w$  (ISO 11654) = 0,80

NRC (ASTM - C423) = 0,75

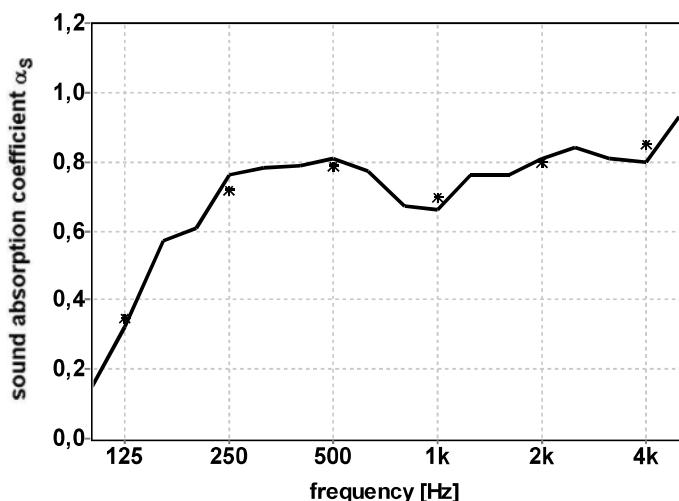

1/3 oct.	0,15 0,32 0,57	0,61 0,76 0,78	0,79 0,81 0,77	0,67 0,66 0,76	0,76 0,81 0,84	0,81 0,80 0,93
1/1 oct.	0,35	0,72	0,			85

publication is permitted for the entire page only

Mook, 06-04-2012