

# Rockfon® CleanSpace™

Designed to exceed hygiene standards



**Sounds Beautiful**

# Content



03  
Trends & Drivers



04  
Introduction to CleanSpace Range



06  
Rockfon® CleanSpace™ Pure




07  
Rockfon® CleanSpace™ Pro



08  
Comparison Table



09  
Cleaning Frequency

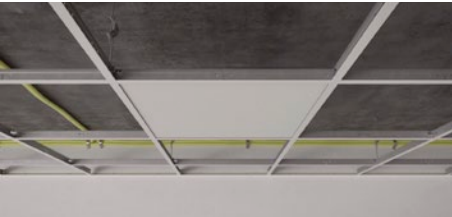

10  
Grid Systems & Mounting Requirements



11  
Our Services



## Hygienic spaces are a must

With a heightened awareness of hygiene and sanitation, it is more relevant than ever to carefully consider the materials that we are exposed to. And in a world where we will share spaces and live closer together, people will feel more comfortable in interiors that are designed for user health and wellbeing.

In order to help you maintain a safe and sterile environment, we are introducing you to our Rockfon CleanSpace range of products designed to meet increasing hygiene demands. All of the solutions within the range are developed with an outstanding balance of acoustic comfort, cleanability and resistance to growth of bacteria and micro-organisms.

**Clean and quiet**  
We're constantly exposed to noise pollution in indoor environments. Everyday activities like conversations, overhead music, telephones and everyday buzz not only harms our health and wellbeing but make it difficult to concentrate. Acoustic solutions create comfortable and safe spaces and have the power to impact everything from performance in schools and offices to the way patients heal in healthcare facilities.



# Introducing Rockfon CleanSpace

With the Rockfon CleanSpace range, you don't have to choose between clean and quiet.

## Optimal Acoustics

Our ceiling solutions are made with stone wool, a naturally sound absorbent material that provides best-in-class acoustics. Our products allow you to create quiet, healthy spaces where people can focus, heal and thrive.

## Easy care and cleaning

From routine to deep cleaning, our stone wool tiles are designed to minimize maintenance time and costs. Our tiles can be easily cleaned with a vacuum cleaner fitted with a soft brush attachment. In hospitals, cafeterias, locker rooms and other spaces where infection control is a priority, our solutions' moisture-repellent surfaces allow for cleaning with water, disinfectants, and even UV and ozone methods.

## Resistance to humidity

Stone wool is a hydrophobic material, meaning it repels water and does not hold any moisture. This makes our CleanSpace range of ceiling tiles not only humidity-resistant, but also sag-resistant. Even in consistently "wet" rooms like kitchens, restrooms, etc., there is no risk of sagging as they remain entirely stable even up to 100 percent relative humidity (RH) and in temperatures ranging from 0 to 40 degrees Celsius.

## Mould & mildew? No thanks.

Materials used in a building's construction can help limit the spread of bacteria and infection. For this reason, it is more critical than ever before to choose surfaces that don't contribute to the development or spread of microorganisms. Our ceiling tiles don't need fungicides or antimicrobials to prevent mould, mildew or bacteria growth. Our products are made of stone wool and have no nutritional value. Therefore, harmful microorganisms that cause skin infections, pneumonia and other airborne illnesses won't grow on the tiles. The CleanSpace range of products offers freedom to design hygienic environments without losing the aesthetic touch.



Meet the CleanSpace range, which includes four acoustic ceiling tile products that are suitable for environments with various hygienic needs. That way you can find the solution that is right for your space.

## Rockfon® CleanSpace™ Pro

A cleanable ceiling tile with good acoustic properties. Applicable in various practical and industrial room types with hygienic requirements. The product is long-lasting, withstands numerous cleaning methods and is ISO Class 4- and HACCP certified.

## Rockfon® CleanSpace™ Pure

A smooth, deep-matt, pure white cleanable ceiling tile with good acoustic properties. Applicable in various room types with cleanability requirements. The product is long-lasting, withstands numerous cleaning and disinfection methods and is ISO Class 3 certified.







## Rockfon® CleanSpace™ Pure


The Pure is a long-lasting acoustic ceiling tile solution that is designed for sanitation, as it is able to endure cleaning and disinfection by a variety of methods. Similar to the Pro, it also has anti-static and dust resistance qualities but with the added bonus of higher light reflection properties, so that you can meet demanding cleaning requirements without compromising aesthetics.

### Your Benefits

1. Class A acoustic performance
2. Aesthetic finish with A-, E- & X-edge
3. High light reflection properties
4. Allows for vacuum, damp cloth cleaning and no sustenance to microorganisms
5. Withstands disinfection methods such as hydrogen vapour peroxide, UVC and Ozone
6. ISO Class 3 certified
7. Diffuse ventilation

### RECOMMENDED FOR USE IN THE FOLLOWING AREAS:

- Catering/Kitchens
- Laboratories
- Retail outlets
- Hydrotherapy rooms
- Kindergarten & schools

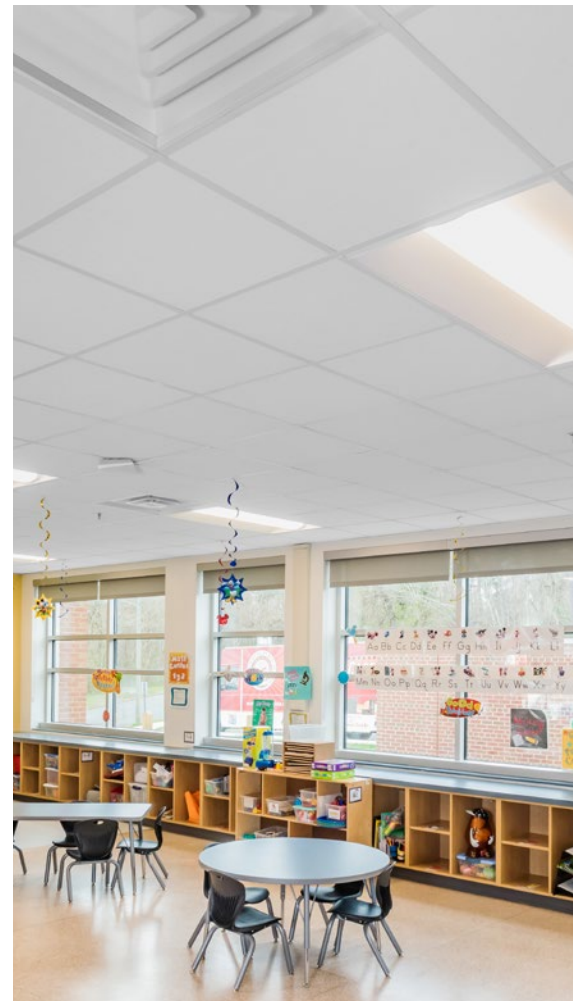

## Rockfon® CleanSpace™ Pro


The Pro is an aesthetic ceiling tile solution that is designed to fulfil the needs of both industrial and practical environments. With antistatic and dust resistance qualities, it guarantees prevention of static electricity build-up while also withstanding various methods of cleaning and disinfections. And last but not least, it is easy to cut and install while containing excellent acoustic properties.

### Your Benefits

1. ISO Class 4 certified
2. Class A acoustic performance
3. Aesthetic finish with A- & E-edge
4. HACCP approved and anti-static
5. Allows for vacuum, damp cloth, low pressure foam- and high-pressure cleaning
6. Resistant to certain (diluted) chemicals with no impact and no sustenance to microorganisms

### RECOMMENDED FOR USE IN THE FOLLOWING AREAS:



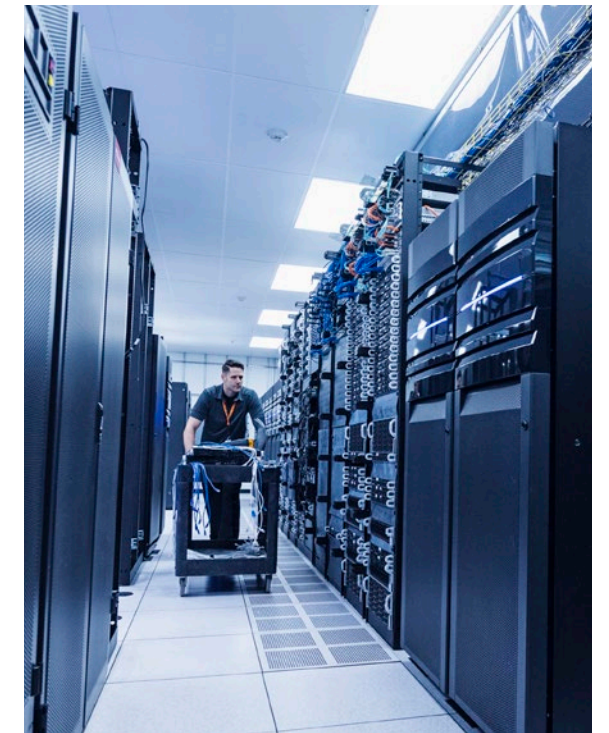








- Restrooms
- Restaurants/Canteens
- Food & drinks Industry
- Datacenters
- Wet rooms (showers)
- Electronic, pharma, optics Industry
- Spa/swimming pools



# Rockfon CleanSpace

## Range Overview

A solution for every hygienic space

| Properties   |  Rockfon®<br>CleanSpace™ Pro  |  Rockfon®<br>CleanSpace™ Pure                |
|--|--|---|
|  <b>Sound absorption</b>              | αw: 1,00 (Class A)<br>NRC : 0.95   | αw: 1,00 (Class A)<br>NRC : 0.95  |
|  <b>Surface durability</b>            | Enhanced durability and dirt resistance  | Enhanced durability, dirt & wet-scrub resistance  |
|  <b>Light reflection</b>              | 85%  | 86%   |
|  <b>Cleaning</b>                     | Vacuum, Damp cloth, Dry steam cleaning, Low pressure foam cleaning, High pressure cleaning<br><i>Chemical Resistance:</i> Resistant to active chlorine* Monthly disinfection | Vacuum, Damp cloth, High pressure cleaning<br><i>Chemical Resistance:</i> Resistant to active chlorine* Weekly disinfection   |
|  <b>Hygiene</b>                     | Stone wool provides no sustenance to microorganisms. Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013.**          |   |
|  <b>Humidity and sag resistance</b> | Up to 100% RH  | Up to 100% RH   |
|  <b>Reaction to fire</b>            | A1   | A1  |
|  <b>Clean room</b>                  | ISO Class 4  | ISO Class 3   |
|  <b>Disinfection</b>                |  | Resistant to using Hydrogen Peroxide Vapor disinfection. Can withstand and will not be affected by UVC and Ozone disinfection |

\* 2,6%, quaternary ammonium 0,25%, hydrogen peroxide 5%, Ethanol 70% and Isopropanol 70%

\*\* Tested with: Methicillin Resistant Staphylococcus Aureus (MRSA), Candida Albicans, Aspergillus Brasiliensis, E.Coli, Bacillus cereus. M1 / zone 4 for the tested 5 pathogens. The particle elimination kinetics class is conform to CP(0,5)5 according to the norm NF S 90-351:2013

Detailed guidelines for cleaning using these methods can be found on Rockfon CleanSpace data sheets. Check out the official cleaning description for Pro for example: Vacuum, Damp cloth, Dry steam cleaning (twice a year), Low pressure foam cleaning (twelve times a year), High pressure cleaning (only applicable for A-edge installation). Max. 80 bar, min. 1 meter distance, water spread at 30(O) angle, max. water flow XXL/sec. The tiles should be clipped into the grid.

# Cleaning Frequency

An overview of applicable cleaning methods, frequency and concentration of chemicals

|                            | Rockfon®<br>CleanSpace™ Pro | Rockfon®<br>CleanSpace™ Pure |
|----------------------------|-----------------------------|------------------------------|
| Basic cleaning             |                             |                              |
| Vacuum                     | Yes                         | Yes                          |
| Damp cloth                 | Yes                         | Yes                          |
| Advanced cleaning          |                             |                              |
| Dry steam cleaning         | Twice a year                |                              |
| Low pressure foam cleaning | Monthly                     |                              |
| High-pressure cleaning*    | Monthly                     | Monthly                      |
| Hydrogen peroxide vapour   | Yes                         | Yes                          |
| Disinfection               |                             |                              |
| UVC disinfection           |                             | Yes                          |
| Ozone disinfection         |                             | Yes                          |
| Chemical resistance        |                             |                              |
| Active chlorine            | 2,60%                       | 2,60%                        |
| Quaternary ammonium        | 0,25%                       | 0,25%                        |
| Hydrogen peroxide          | 5%                          | 5%                           |
| Ethanol                    | 70%                         | 70%                          |
| Isopropanol                | 70%                         | 70%                          |
| Formalin                   |                             |                              |
| Ammonia                    |                             |                              |
| Sulphuric acid             |                             |                              |
| Phosphoric acid            |                             |                              |
| Peracetic acid             |                             |                              |
| Hydrochloric acid          |                             |                              |
| Isopropanol                |                             |                              |
| Sodium hydroxide           |                             |                              |
| Sodium hypochlorite        |                             |                              |

\*only applicable for A-edge installation



Grid Systems

The Rockfon CleanSpace range of tiles can be combined with a click grid system, providing quick and easy mounting and demounting. The T profiles have a width of 24 mm and all components are made of galvanised steel with a smooth, white surface. The grid will be visible with Rockfon CleanSpace A-edge tiles, semi-concealed with E-edge tiles or hidden with X-edge tiles. The grid system also includes main runners, cross tees, hangers and other necessary components. For detailed information on compatible grid systems, please reference the Rockfon CleanSpace Installation Guide.

Mounting Requirements

| MOUNTING REQUIREMENTS FOR PLASTIC HOLD DOWN CLIPS HDC1/ HDC2/ HDC3 |                |                  |      |      |               |      |             |      |      |                                     |       |
|--|----------------|------------------|------|------|---------------|------|-------------|------|------|-------------------------------------|-------|
| TILE   |                | APPLICATION AREA |      |      |               |      |             |      |      |                                     |       |
|  |                | CLEANING         |      |      |               |      | WIND UPLIFT |      |      | DIFFERENTIAL PRESSURE/AIR TIGHTNESS | SLOPE |
|  |                | STANDARD         |      |      | HIGH PRESSURE |      |             |      |      |                                     |       |
| EDGE   | THICKNESS (MM) | HDC1             | HDC2 | HDC3 | HDC1          | HDC3 | HDC1        | HDC2 | HDC3 | HDC2                                | HDC1  |
| A  | 2              | 3/7              |      |      |               |      | 3/8         |      |      |                                     |       |
|  | 20             | 3/7              |      |      | 4/9           |      | 3/8         |      |      |                                     |       |
|  | 25             |                  | 3/7  |      |               |      |             | 3/8  |      | 4/9                                 |       |
|  | 40             |                  |      | 3/7  |               | 4/9  |             |      | 3/8  |                                     |       |
| E  | 20             | 2/6              |      |      |               |      | 3/8         |      |      |                                     |       |
| X*   | 22             | 1/5              |      |      |               |      |             |      |      |                                     | 1/5   |

1. Due to the design of the X, the hold down clip does not impede access to the plenum, permitting easy contact to the installations behind the ceiling.

| AMOUNT OF CLIPS/M² |         |                 |
|--------------------|---------|-----------------|
| MODULATION         | DRAWING | AMOUNT OF CLIPS |
| 600x600 mm         | 1       | 5,6 clips / m²  |
|                    | 2       | 5,6 clips / m²  |
|                    | 3       | 2,8 clips / m²  |
|                    | 4       | 11,2 clips / m² |
| 1200x600 mm        | 5       | 4,2 clips / m²  |
|                    | 6       | 4,2 clips / m²  |
|                    | 7       | 2,8 clips / m²  |
|                    | 8       | 1,4 clips / m²  |
|                    | 9       | 8,33 clips / m² |

The numbers in the table refer to the drawings on the following pages. These drawings only show a few ceiling options, depending on the tile dimension. For other dimensions, contact Rockfon technical service.

Be part of making the world sound better to everyone

Get started today

Rockfon is part of the ROCKWOOL Group and we are the world’s leading acoustic company – and our mission is to keep things quiet.

We are the zzz in restful hospitals

Every day we are inspired to innovate with sound solutions that help people think, relax and enjoy life more. Our acoustic solutions do more than reduce noise, they also create calmer, healthier buildings for patients and staff.

We’re here to help

We have 22 offices and 9 manufacturing facilities worldwide and we’re on hand to help you find the right acoustic solutions for your next healthcare project.



Your sustainable building partner

Our high-quality products are made from natural stone. They work, they’re beautiful and they last – until they’re recycled to make more. And we provide all the necessary documentation to support you in creating a sustainable hospital project.

Our online resources

Explore our website for sound calculations, instruction videos, documents, and a comprehensive BIM library with objects compatible with ArchiCAD and Revitt. Speed up your design processes with this free to use support on:

en.rockfon.international

Rockfon® is a registered trademark  
of the ROCKWOOL Group.

 [linkedin.com/company/Rockfon-as](https://www.linkedin.com/company/Rockfon-as)

 [pinterest.com/Rockfon](https://www.pinterest.com/Rockfon)

 [youtube.com/RockfonOfficial](https://www.youtube.com/RockfonOfficial)

 [facebook.com/RockfonOfficial](https://www.facebook.com/RockfonOfficial)

 [instagram.com/Rockfon\\_Official](https://www.instagram.com/Rockfon_Official)

04.2022 | All colour codes mentioned are based on the NCS - Natural Colour System® - property of and used on  
license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product  
technology without prior notice. Rockfon accepts no responsibility for printing errors.

## Sounds Beautiful

### Rockfon Singapore

ROCKWOOL Building Materials  
(Singapore) Pte Ltd.  
No. 7, Tuas Avenue 1  
Jurong Town,  
Singapore 639492  
Tel: (+65) 6861 4722  
Fax: (+65) 6862 3533  
E-mail: [enquiry@rockfon.com](mailto:enquiry@rockfon.com)  
[en.rockfon.international](http://en.rockfon.international)

### Rockfon Hong Kong

ROCKWOOL Building Materials  
(Hong Kong) Ltd.  
Unit 301-2, 3/F, Koon Wah Building,  
No.2 Yuen Shun Circuit,  
Yuen Chau Kok, Shatin,  
N.T., Hong Kong  
Tel: (+852) 2576-6117  
Mobile: (+852) 9161-7924  
E-mail: [enquiry@rockfon.com](mailto:enquiry@rockfon.com)  
[en.rockfon.international](http://en.rockfon.international)

### Rockfon

ROCKWOOL Middle East FZE  
Office 139, Building 6WB, DAFZA  
P. O. Box 293585, Dubai, UAE  
  
Tel: +971-4-214-6280  
E-mail: [rockfonme@rockfon.com](mailto:rockfonme@rockfon.com)  
[en.rockfon.international](http://en.rockfon.international)

### Rockfon

ROCKWOOL France S.A.S.  
111, rue du Château des Rentiers  
75013 Paris  
  
Tel: +33 1 40 77 82 82  
Fax.: +33 1 45 86 77 90  
E-mail: [info@rockfon.fr](mailto:info@rockfon.fr)  
[www.rockfon.fr](http://www.rockfon.fr)

