

Rockfon Artic[®]


0.75
NRC

Features & Benefits

- Smooth white surface
- Economic solution with standard sound absorption (NRC = 0.75)
- Fire Performance - Class A
- Lightweight panel, easy to carry and install
- Available in square lay-in and tegular

Applications

- Retail
- Corridor
- Break Room
- Waiting Room

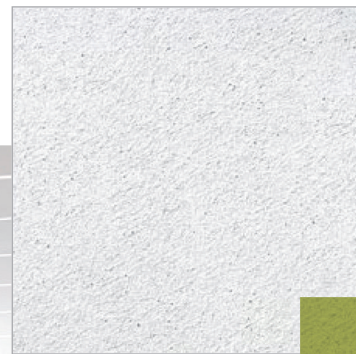

Rockfon ceiling tiles are manufactured using advanced stone wool technology. All stone wool tiles benefit from:

**High Acoustic Absorption****Fire Performance - Class A****Moisture and Sag Resistance****Smooth, Modern Aesthetics**

Materials and Resources (MR)

- Waste Management Planning
- Interiors Life Cycle Impact Reduction
- Environmental Product Declarations
- Sourcing of Raw Materials
- Material Ingredients
- Waste Management

Indoor Environmental Quality (EQ)

- Low-Emitting Materials ✓
- ✓ Interior Lighting ✓
- ✓ Acoustic Performance ✓

Recycled Content: 48%



Standard Panels



Packaging Information

Edge Designation	Item Number	Modular Size (nominal)	NRC	AC	Fire Class	Light Reflectance	Sag Resistance (relative humidity)	Low VOC	lbs/sqft	sqft/carton
	SQ 600	2' x 2' x 5/8"	0.75	-	A	0.85	up to 100%	✓	0.38	112
	SQ 601	2' x 4' x 5/8"	0.75	-	A	0.85	up to 100%	✓	0.38	112
	SQ 609	20" x 60" x 3/4"	0.75	-	A	0.85	up to 100%	✓	0.45	83.33
	SQ 610	2' x 5' x 3/4"	0.75	-	A	0.85	up to 100%	✓	0.45	100
	SLN 620	2' x 2' x 5/8"	0.75	-	A	0.85	up to 100%	✓	0.47	56
	SLN 621	2' x 4' x 5/8"	0.75	-	A	0.85	up to 100%	✓	0.47	112
	SL 660	2' x 2' x 5/8"	0.75	-	A	0.85	up to 100%	✓	0.47	56
	SL 661	2' x 4' x 5/8"	0.75	-	A	0.85	up to 100%	✓	0.47	112

Recycled content values for our stone wool tiles and panels are based on 2021 production averages of a standard 2'x2' tile, and based on their primary production location.

15/16" Suspension Systems	9/16" Suspension Systems
200, 1200 and Fire Rated systems	4000, 4500, 4600 and Fire Rated systems
<p>SQ - Square Lay-In SL - Square Tegular</p>	<p>SQ - Square Lay-In (2' x 2' & 2' x 4' only) SLN - Square Tegular Narrow</p>



Rockfon Artic® Properties

Material

Stone wool (Mineral Wool) ceiling tiles with factory applied latex paint on glass scrim surface
ASTM E1264 CLASSIFICATION: Type XX - Stone wool base with membrane-faced overlay, Pattern G



Fire Performance

Surface burning characteristics:
UL723 (ASTM E84) Flame Spread Index: 0
Smoke Developed Index (UL Labeled): 5
CAN/ULC S102 Flame Spread Index: 5
Smoke Developed Index: 0



Sustainability

Many of Rockfon stone wool acoustic solutions are GREENGUARD Gold low VOC certified and meet the State of California's Department of Public Health Services Standard Practice for Specification Section 01350 (California Section 01350) for testing chemical emissions.

Selected potential applications: LEED, WELL, CHPS, Green Globes, BREEAM Int. and CALGreen

- ✓ GREENGUARD Gold available*
- ✓ Environmental Product Declaration available*
- ✓ Health Product Declaration available*
- ✓ Declare Label available*

* Applicable to all edge types



Cleaning

Vacuum



Environment

48% recycled content. Recycled content based on U.S. manufacturing.



Warranty

30-Year Limited Product Warranty
See rockfon.com



Thermal Insulation

R Value (BTU Units): 2.2 - 2.6
RSI Value (Watts Units): 0.39 - 0.46



Hygiene

Stone wool provides no sustenance to microorganisms



Tile Directionality

Rockfon Artic® tiles are directional and must be installed according to backside arrow direction. The arrow can be turned 180°, not 90°.



GREENGUARD Gold Certified
for Office and Educational
Environments



CERTIFIED Environmental
Product Declaration

2023 | Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.
© ROCKWOOL 2022. All rights reserved.
® denotes a trademark that is registered in the United States of America.

060123

Rockfon

4849 S. Austin Ave.
Chicago, IL 60638 USA

Tel. +1-800-323-7164
cs@rockfon.com
rockfon.com