

# Rockfon® Industrial™ Black

**1.05**  
NRC

## Features & Benefits

- For industrial applications
- Excellent sound absorption (NRC = 1.05)
- Fire Performance - Class A
- To create a new ceiling or place under an existing one
- Available in square lay-in

## Applications

- Light Industry
- Heavy Industry

**mindful**  
MATERIALS

Rockfon ceiling tiles are manufactured using advanced stone wool technology. All stone wool tiles benefit from:

**High Acoustic  
Absorption****Fire Performance -  
Class A****Moisture and  
Sag Resistance****Smooth, Modern  
Aesthetics**

# Rockfon® Industrial™ Black

## LEED® v4.1 Highlights

### Materials and Resources (MR)

- Waste Management Planning
- Interiors Life Cycle Impact Reduction
- Environmental Product Declarations
- Sourcing of Raw Materials
- Material Ingredients
- Waste Management








### Indoor Environmental Quality (EQ)

- Low-Emitting Materials ✓
- Interior Lighting ✓
- Acoustic Performance ✓

Recycled Content: 53%



## Standard Panels

Standard Panels									Packaging Information			
Edge Designation		Item Number	Modular Size (nominal)	NRC	AC	Fire Class	Light Reflectance	Sag Resistance (relative humidity)	Low VOC	lbs/sqft	sqft/carton	
<div>Square Lay-In</div> 		SQ	6300	2' x 4' x 2"	1.05	-	A	0.04	up to 100%	✓	0.8	32


Recycled content values for our stone wool tiles and panels are based on 2021 production averages of a standard 2'x4' tile, and based on their primary production location.

### 15/16" Suspension Systems

200, 1200 and Fire Rated systems

SQ - Square Lay-In



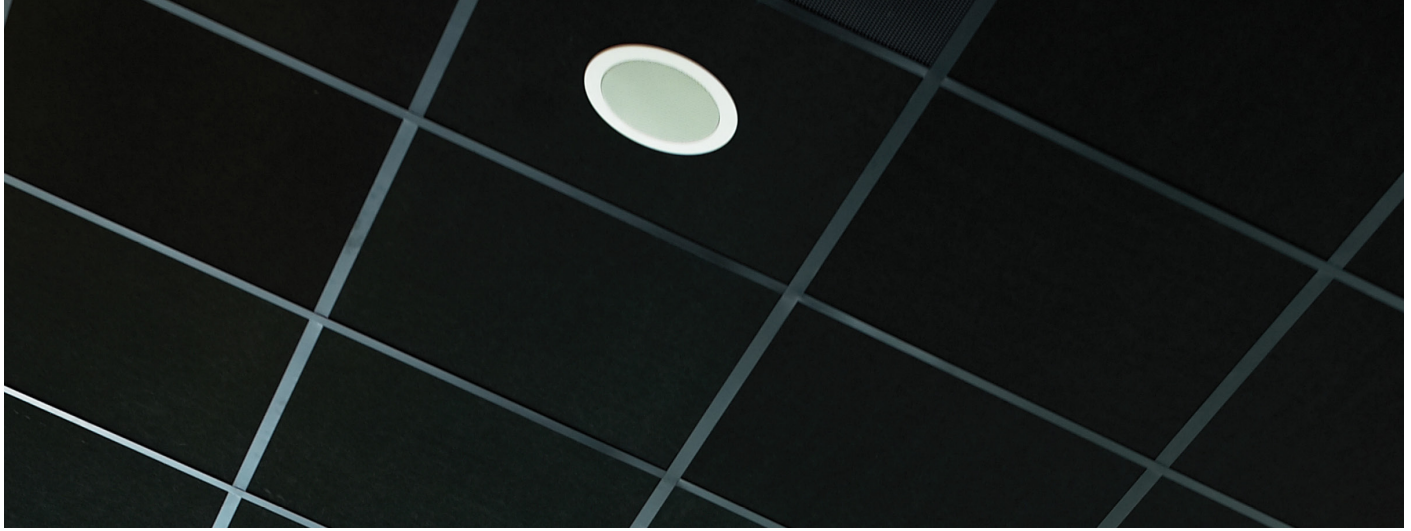

## Rockfon® Industrial™ Black Properties

### Material

Stone wool (Mineral Wool) ceiling tiles with factory painted glass scrim surface

ASTM E1264 CLASSIFICATION: Type XX - Stone wool base with membrane-faced overlay, Pattern G



#### Fire Performance

Surface burning characteristics:  
UL723 (ASTM E84) Flame Spread Index: 5  
Smoke Developed Index (UL Labeled): 0  
CAN/ULC S102 Flame Spread Index: 15  
Smoke Developed Index: 5



#### Sustainability

Many of Rockfon stone wool acoustic solutions are GREENGUARD Gold low VOC certified and meet the State of California's Department of Public Health Services Standard Practice for Specification Section 01350 (California Section 01350) for testing chemical emissions.

Selected potential applications: LEED, WELL, CHPS, Green Globes, BREEAM Int. and CALGreen



#### Cleaning

Vacuum



#### Environment

53% recycled content. Recycled content based on U.S. manufacturing.



#### Warranty

30-Year Limited Product Warranty  
See [rockfon.com](http://rockfon.com)



#### Thermal Insulation

R Value (BTU Units): 7.0  
RSI Value (Watts Units): 1.23



#### Hygiene

Stone wool provides no sustenance to microorganisms



GREENGUARD Gold Certified  
for Office and Educational  
Environments



CERTIFIED Environmental  
Product Declaration

072022

**Rockfon**

4849 S. Austin Ave.  
Chicago, IL 60638 USA

2022 | Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.  
© ROCKWOOL International A/S 2018. All rights reserved.  
® denotes a trademark that is registered in the United States of America.

Tel. +1-800-323-7164  
Fax. +1-800-222-3744  
[rockfon.com](http://rockfon.com)