Rockfon®

DATASHEET

Rockfon Pacific®

Sounds Beautiful

Rockfon Pacific®

- Economical tile with standard surface
- Class B sound absorption with lightweight 12mm thickness
- Basic range of tile dimensions in semi-concealed and visible grid options
- Easy to clean with a vacuum

Product Description

- Stone wool tile
- Visible side: Nuanced white painted fleece
- Rear Side: back fleece

Application Areas

- Office
- Retail

Edge detail	Module size (mm)	Weight (kg/m²)	MS / MS easy access (mm)	Recommended installation system
A15	600 x 600 x 12	1,6	50 / 100	Rockfon® System T15 A™
	1200 x 600 x 12	1,6	50 / 100	Rockfon® System T15 A™
A24	600 x 600 x 12	1,6	50 / 100	Rockfon® System T24 A™
	1200 x 600 x 12	1,6	50 / 100	Rockfon® System T24 A™
E15 	600 x 600 x 12	1,9	60 / 100	Rockfon® System T15 E™
E24 	600 x 600 x 12	1,9	60 / 100	Rockfon® System T24 E™

MS = Minimum suspension
MS easy access = Minimum suspension - tiles demountable

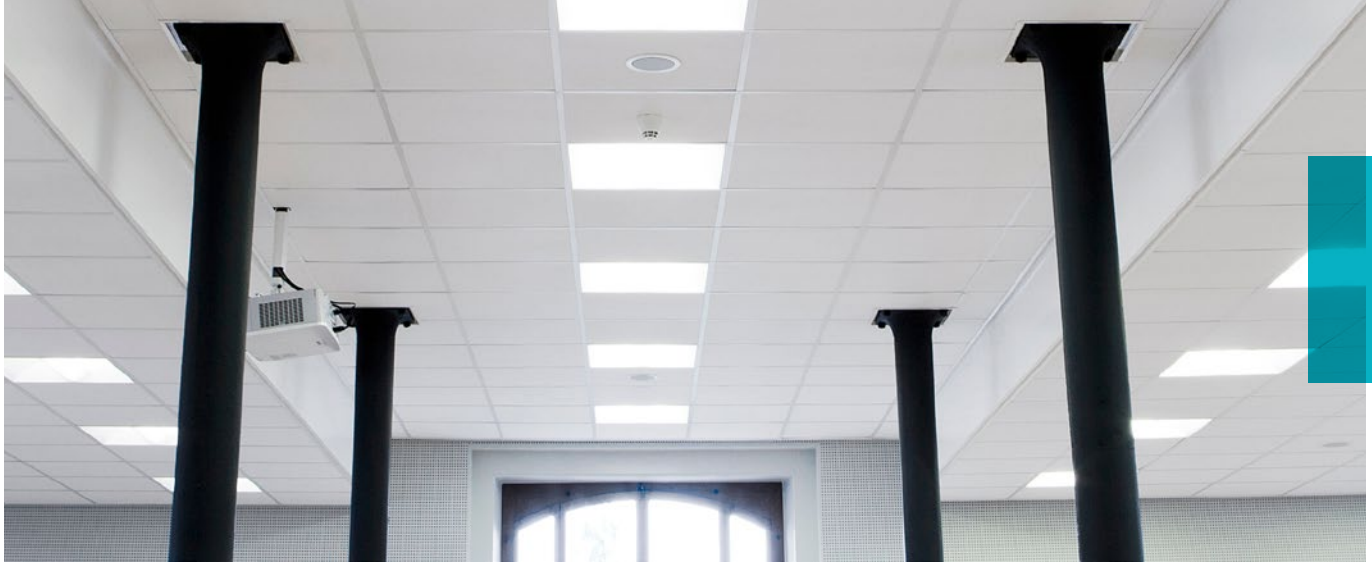

Performance

Sound absorption
α_w: 0,80 (Class B)

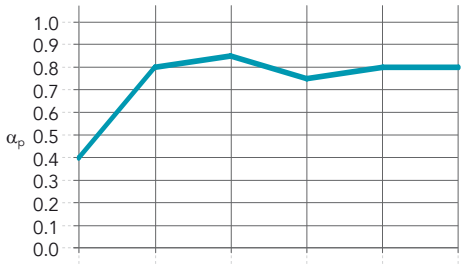

Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
12 / 200	0.40	0.80	0.85	0.75	0.80	0.80	0.80	B	0.80

Reaction to fire
A1

Humidity and sag resistance
Up to 100% RH.
No visible deflection in high humidity

Cleaning
- Vacuum

Hygiene
Stone wool provides no sustenance to microorganisms

Environment
Fully recyclable stone wool
The recycled content of Rockfon products is between 29% and 64% according to ISO 14021.
Rockfon acoustic solutions are Cradle to Cradle Certified® Silver and Bronze (depending on product type).

Carbon footprint
Cradle-to-Gate 2.12 kg of CO_2 eq. (based on third party verified EPD)
Cradle-to-Grave 2.75 kg of CO_2 eq. (based on third party verified EPD)

Indoor environment
A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products

Sounds Beautiful

01.2023 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.