
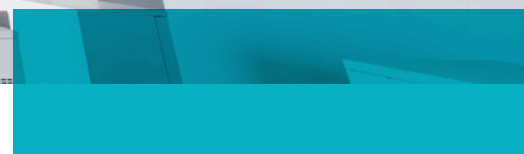


Rockfon Eclipse®

Datasheet



Sounds Beautiful

Rockfon Eclipse®







- Innovative and aesthetically pleasing frameless acoustic island comes in a smooth, deep-matt, and super white surface providing high light reflection, light diffusion and anti-static properties, extending product lifetime
- Rockfon Eclipse is available in a variety of shaped formats with a clean minimalistic A-edge and an unlimited custom colour range using NCS
- Quick and easy to install, Rockfon Eclipse can be used alone or where a traditional suspended ceiling cannot be installed
- Perfect for thermal mass installations with rear surface providing excellent heat and light reflection

Product Description


- Stone wool island
- Visible side: smooth, deep matt, super white painted fleece
- Rear side: white backing fleece
- Painted edges

Application Areas

- Retail
- Education
- Office
- Leisure

Edge detail	Shapes	Module size (mm)	Approximate weight (kg/unit)	Recommended installation System
	Circle 	800 x 800 x 40	3	Rockfon® System Eclipse Island™
	Square 	1160 x 1160 x 40	7	Rockfon® System Eclipse Island™
	Hexagon 		9	Rockfon® System Eclipse Island™
	Rectangle 		6	Rockfon® System Eclipse Island™
	Rectangle 	1760 x 1160 x 40	13	Rockfon® System Eclipse Island™

Contact us for special shapes, colours, sizes, lead times and minimum quantities.

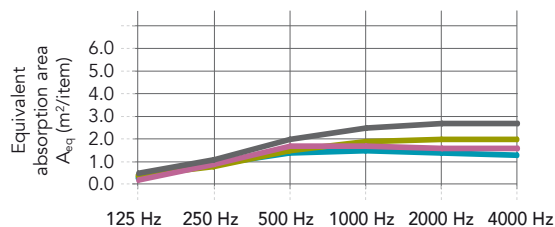

Performance




Sound absorption

A_{eq} (m²/item)

* Distance between items greater or equal to 2000mm. Further acoustic data available; contact your local Rockfon technical support.

Circle 1160 single item* (suspension height: 13 mm)	0.3	0.9	1.4	1.5	1.4	1.3
Circle 1160 single item* (suspension height: 500 mm)	0.4	0.8	1.5	1.9	2.0	2.0
Square 1160 single item* (suspension height: 13mm)	0.2	0.9	1.7	1.7	1.6	1.6
Square 1160 single item* (suspension height: 500mm)	0.5	1.1	2.0	2.5	2.7	2.7

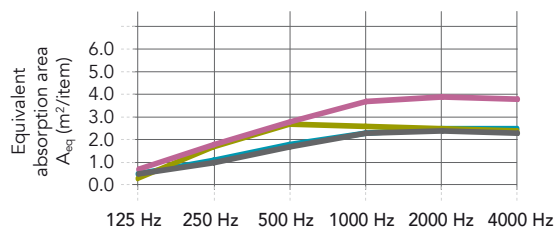

Square 1160 array of 5 items, 300mm distance (suspension height 500mm)	0.5	1.1	1.8	2.3	2.5	2.5
Rectangle 1760 single item* (suspension height: 13mm)	0.3	1.7	2.7	2.6	2.5	2.4
Rectangle 1760 single item* (suspension height: 500mm)	0.7	1.8	2.8	3.7	3.9	3.8
Hexagon 1160 single item* (suspension height: 500 mm)	0.5	1.0	1.7	2.3	2.4	2.3



Reaction to fire

A1



Light reflection and light diffusion

87% light reflection (rear side: 79%)
>99% light diffusion



Humidity and sag resistance

Up to 100% RH.
No visible deflection in high humidity
Rockfon Eclipse is not suitable for use in swimming pools or outdoors.
For more information, please contact Rockfon.



Cleaning

- Vacuum
- Damp cloth



Hygiene

Stone wool provides no sustenance to microorganisms



Surface durability

Enhanced durability and dirt resistance.

Wet-scrub resistance: Class 1

The wet-scrub resistance is tested in accordance with EN ISO 11998:2007, rated on a scale from 1 to 5, where 1 is best.



Environment

Fully recyclable stone wool
The recycled content of Rockfon products is between 29% and 64% according to ISO 14021.
Rockfon acoustic solutions are Cradle to Cradle Certified® Silver and Bronze (depending on product type).



Carbon footprint

6.12 kg of CO₂ eq.
(cradle to gate based on EPD)



Indoor environment

A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



Visual appearance

Super-white surface
L value: 94.5
The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).

Deep matt surface, perfect in critical side-light
Gloss: 0.8 gloss unit at 85° angle
The gloss of the product is tested in accordance with ISO 2813.



Rockfon® is a registered trademark
of the ROCKWOOL Group.

06.2021 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

Rockfon Singapore

ROCKWOOL Building Materials
(Singapore) Pte Ltd.
No. 7, Tuas Avenue 1
Jurong Town,
Singapore 639492
Tel: (+65) 6861 4722
Fax: (+65) 6862 3533
E-mail: enquiry@rockfon.com
www.rockfon.asia

Rockfon Hong Kong

ROCKWOOL Building Materials
(Hong Kong) Ltd.
Unit 301-2, 3/F, Koon Wah Building,
No.2 Yuen Shun Circuit,
Yuen Chau Kok, Shatin,
N.T., Hong Kong
Tel: (+852) 2576-6117
Mobile: (+852) 9161-7924
E-mail: enquiry@rockfon.com
www.rockfon.asia

Rockfon

ROCKWOOL Middle East FZE
Office 139, Building 6WB, DAFZA
P. O. Box 293585, Dubai, UAE

Tel: +971-4-214-6280
E-mail: rockfonme@rockfon.com
ae.rockfon.com

Rockfon

ROCKWOOL France S.A.S.
111, rue du Château des Rentiers
75013 Paris

Tel: +33 1 40 77 82 82
Fax.: +33 1 45 86 77 90
E-mail: info@rockfon.fr
www.rockfon.fr

